


Service
Service
Service

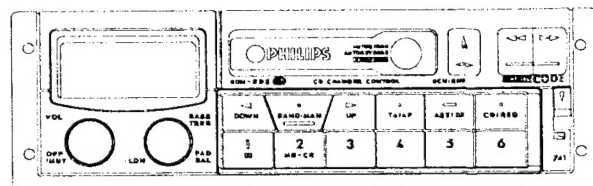

For repair information of the Cassette deck see Service Manual N° 4822.725.24071 of Auto Cassette Deck P6-25/2
+ 4647

Service Manual

12V


Contents

page

Controls and connections	-2
Technical data - Chips handling	-3
Security code	-4
Block diagram	-5-5a
Main panel PCB layout	-6-6a-19-19a
RFD schematic diagram	-7-7a
CTR schematic diagram	-8-8a
Checks and adjustments / DC voltages	-9-9a
APS module schematic diagram	-10-10a
APS module PCB layout	-11
RDS module PCB layout	-12
RDS module schematic diagram	-13-13a
Deck module schematic diagram	-14-14a
Deck module PCB layout	
Det-unit PCB layout and schematic diagram	-15-15a
FHD schematic diagram	-16-16a
LCD schematic diagram	-17-17a
SPM schematic diagram	-18-18a
Exploded view / Mechanical partslist	-20-20a
Electrical partslist	-21-21a-22-22a-23
Technician's remarks	-24




CONTROLS

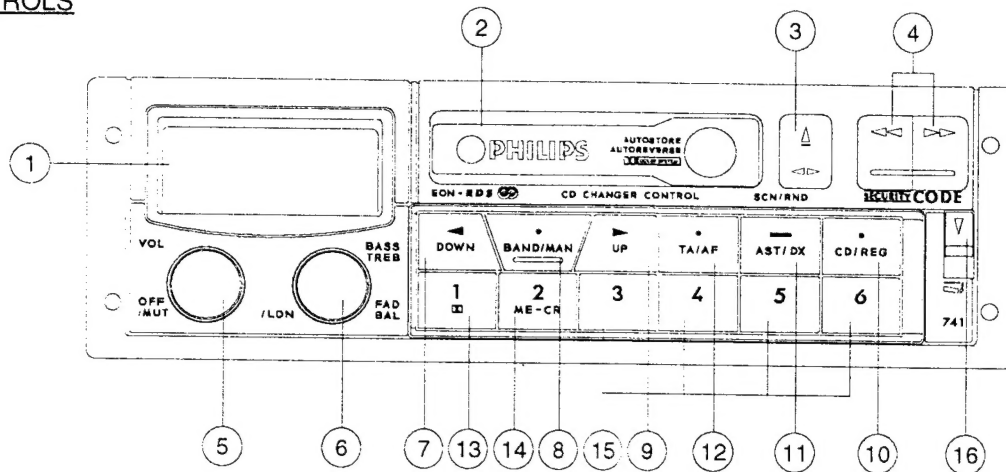

- | | |
|---|--|
| ① Display | ⑩ Select CD mode/Select Regional |
| ② Cassette Opening | ⑪ Autostore /Select Distance Mode (Radio Mode) |
| ③ Eject / Reverse Button | Scan / Random (CD Mode) |
| ④ FRW / FFW Buttons | ⑫ Select info /Select RDS |
| ⑤ ON/OFF / Volume / Mute | ⑬ Preset 1 / Dolby |
| ⑥ Bass / Treeble / Fader / Balance / Loudness | ⑭ Preset 2 / Metal - Chrome |
| ⑦ Search Down | ⑮ Preset 3 to 6 |
| ⑧ Wave Range / Manual Mode | ⑯ Release Knob for Detachable Unit |
| ⑨ Search Up | |

CONNECTIONS

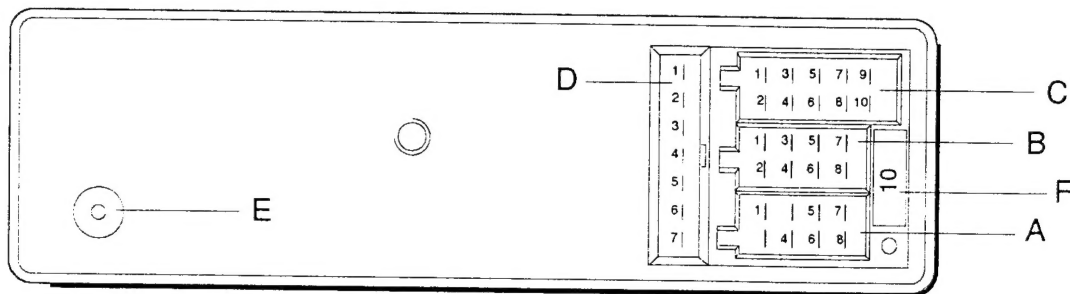

A: POWER SUPPLY	B: LOUDSPEAKERS	C: CD CHANGER	D: LINE OUT
A1 external Mute	B1 Rear Right	C1 Bus Ground	D1 Switched Plus
A4 Permanent Plus	B2 Rear Right Ground	C2 Bus Clock Ext.	D3 Ground
A5 Switched Plus Aerial	B3 Front Right	C3 Bus Data Ext	D4 Front Right
A7 Switched Plus	B4 Front Right Ground	C5 Plus Ignition Key	D5 Rear Right
A8 Ground	B5 Front Left	C6 Ground	D6 Front Left
	B6 Front Left Ground	C7 Switched Plus	D7 Rear Left
	B7 Rear Left	C8 Line In Right	
	B8 Rear Left Ground	C9 Line In Left	
		C10 Line IN Ground	
B: AERIAL PLUG			
F: FUSE : 10A			

TECHNICAL DATA

GENERAL

Power supply : 14.4V DC
Dimensions : 180x150x51 mm

RADIO

LW : 144-288 KHz
MW : 531-1611 KHz
FM : 87.5-108 MHz
IF-AM : 10.7 MHz
IF-FM : 10.7 MHz
Sensitivity 26dB S/N : 40 μ V (LW)
: 30 μ V (MW)
: 3,5 μ V (FM)
Limitation α -3dB : 8 to 25 μ V






CASSETTE

Cassette mechanism : P6-25/2
Number of tracks : 2x2
Tape speed : 4.76 cm/sec
Wow and flutter : \leq 0.35%
Crosstalk : \geq 30dB

AMPLIFIER


Output power : 4x15W / 4 Ω (D = 10%)
Loudness : +9dB \pm 2dB at 60Hz
Treble control : +10/-10 \pm 2dB at 10kHz
Bass control : +16/-11 \pm 2dB at 60Hz
Balance control : -26dB
Fader : -26dB
Mute : -70dB

HANDLING CHIP COMPONENTS

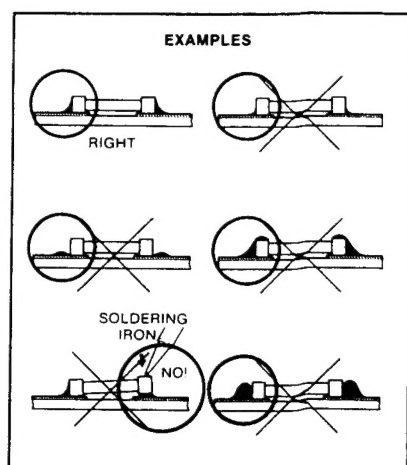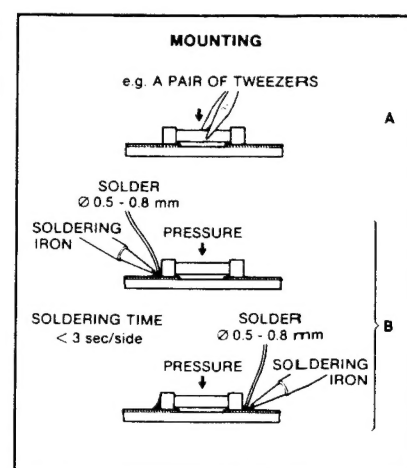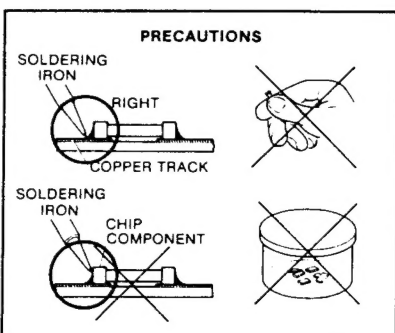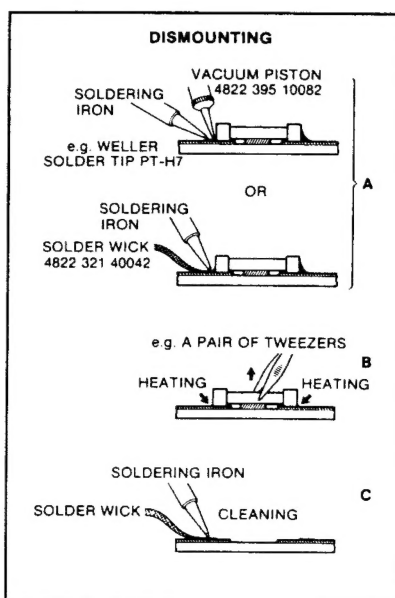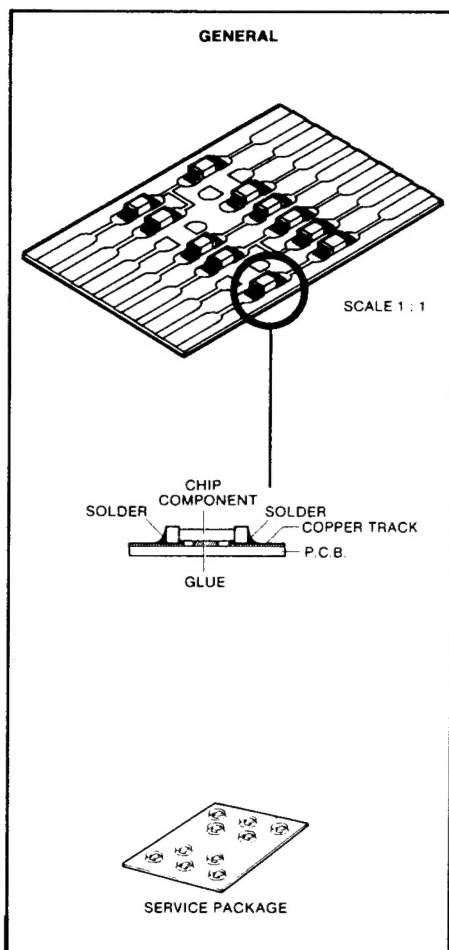


SECURITY CODE

ACTIVATING PROTECTION





ENTERING A CODE


Example : 3752

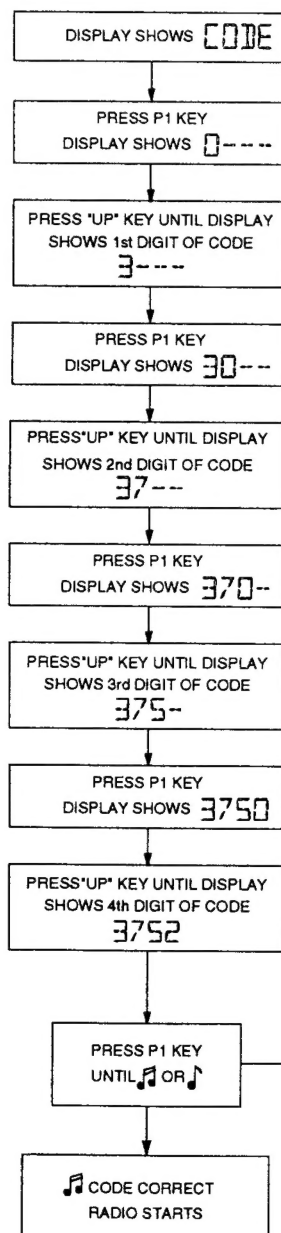

DEACTIVATING PROTECTION

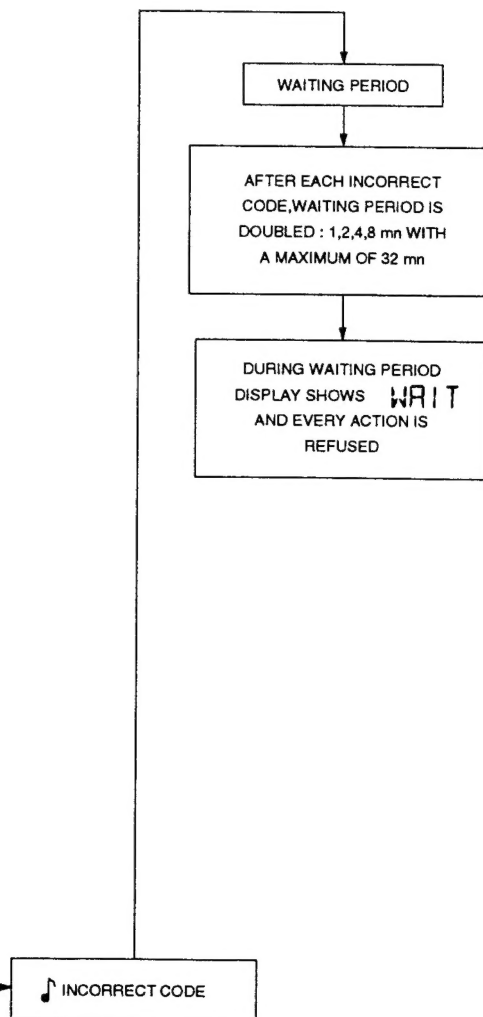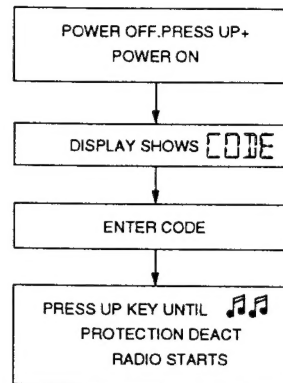


22DC741/00/00
BLOCK DIAGRAM

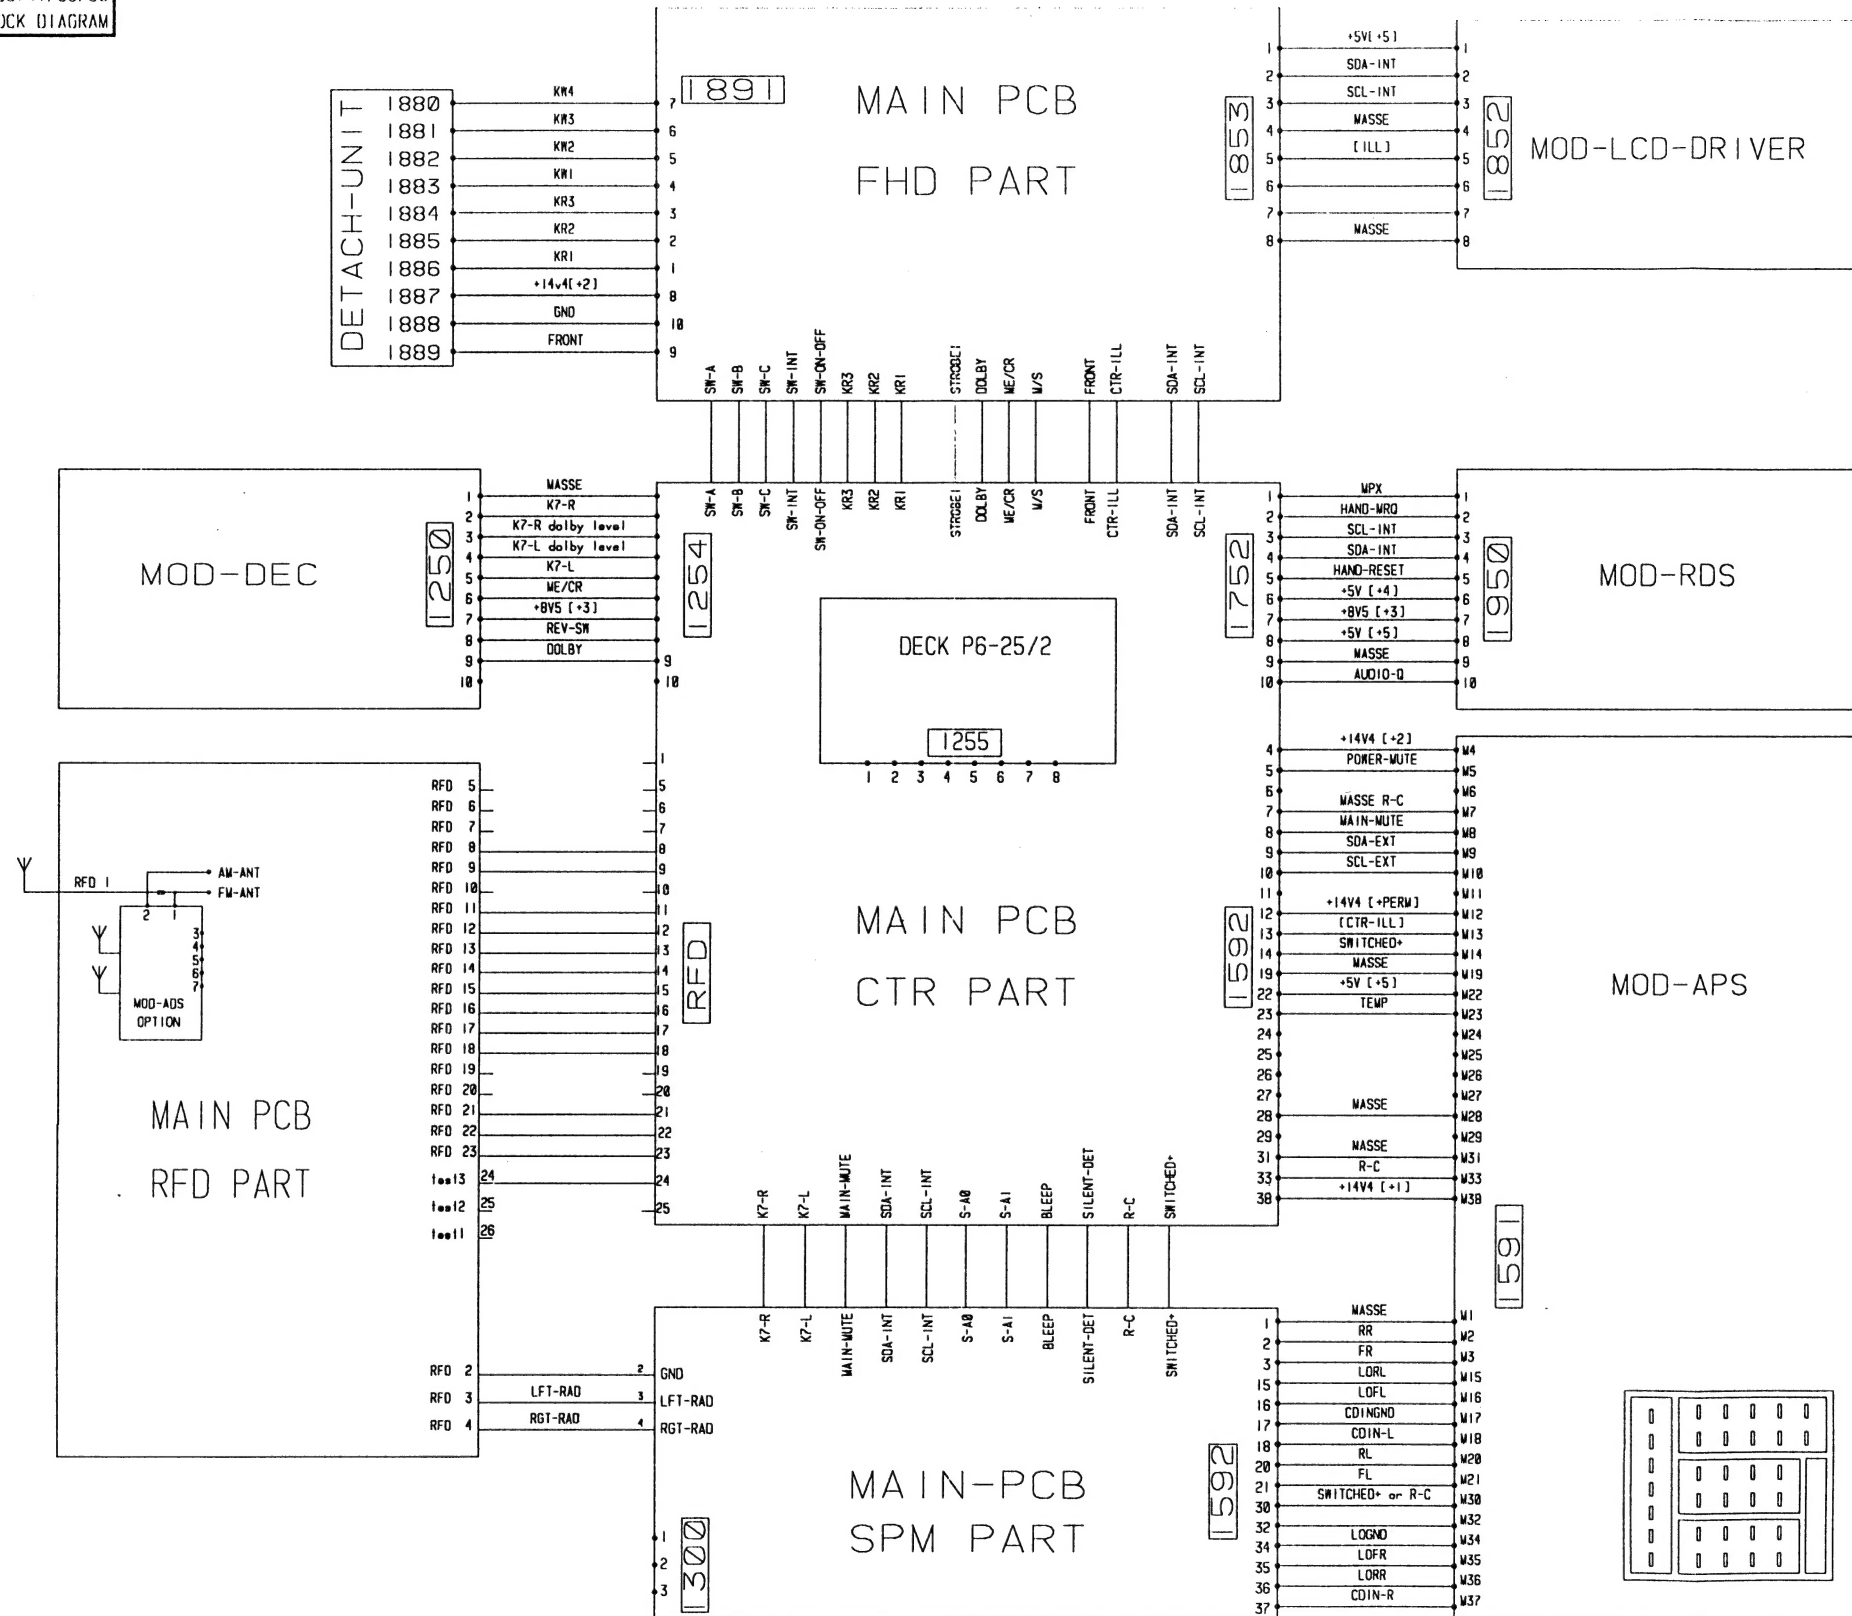


Main Panel

2059 F 6	2210 F 4	2481 H 8	2516 E 5	2528 E 7	2640 B 4	5190 I 5	5059 G 7	6607 A 7	1100 J 5	1891 H 1	5117 I 3	7370 D 3
2063 F 7	2211 F 2	2482 H 8	2518 E 6	2600 B 5	2657 A 4	5050 I 7	5180 H 5	6631 B 5	1254 J 2	3155 I 3	5150 I 2	7600 A 6
2064 F 6	2216 F 4	2483 H 8	2519 D 6	2601 B 6	2727 F 5	5051 I 7	5651 B 4	6671 D 2	1255 C 5	3157 I 3	5200 F 4	7601 A 7
2068 G 6	2350 D 7	2510 D 3	2522 E 5	2602 B 4	3625 B 7	5052 H 7	6002 J 7	6701 B 1	1592 G 8	3209 G 2	5650 B 2	7720 F 5
2157 G 4	2351 E 7	2511 E 3	2523 F 5	2603 B 5	3822 D 7	5053 H 7	6100 I 4	6702 C 1	1700 B 1	5055 G 5	7050 H 6	7750 C 4
2160 G 2	2354 E 6	2512 D 5	2525 E 6	2605 B 7	3823 D 7	5054 G 6	6520 E 4	6821 C 7	1853 D 4	5057 G 6	7150 H 3	
2185 H 5	2355 E 3	2513 D 5	2526 E 7	2607 B 7	5072 H 6	5056 G 5	6601 A 5	6822 C 7	1874 B 1	5070 F 7	7180 H 4	
2186 I 4	2480 G 8	2515 D 4	2527 E 7	2608 B 6	5073 I 2	5058 H 7	6603 A 5	1001 J 7	1875 C 1	5071 H 6	7210 F 3	

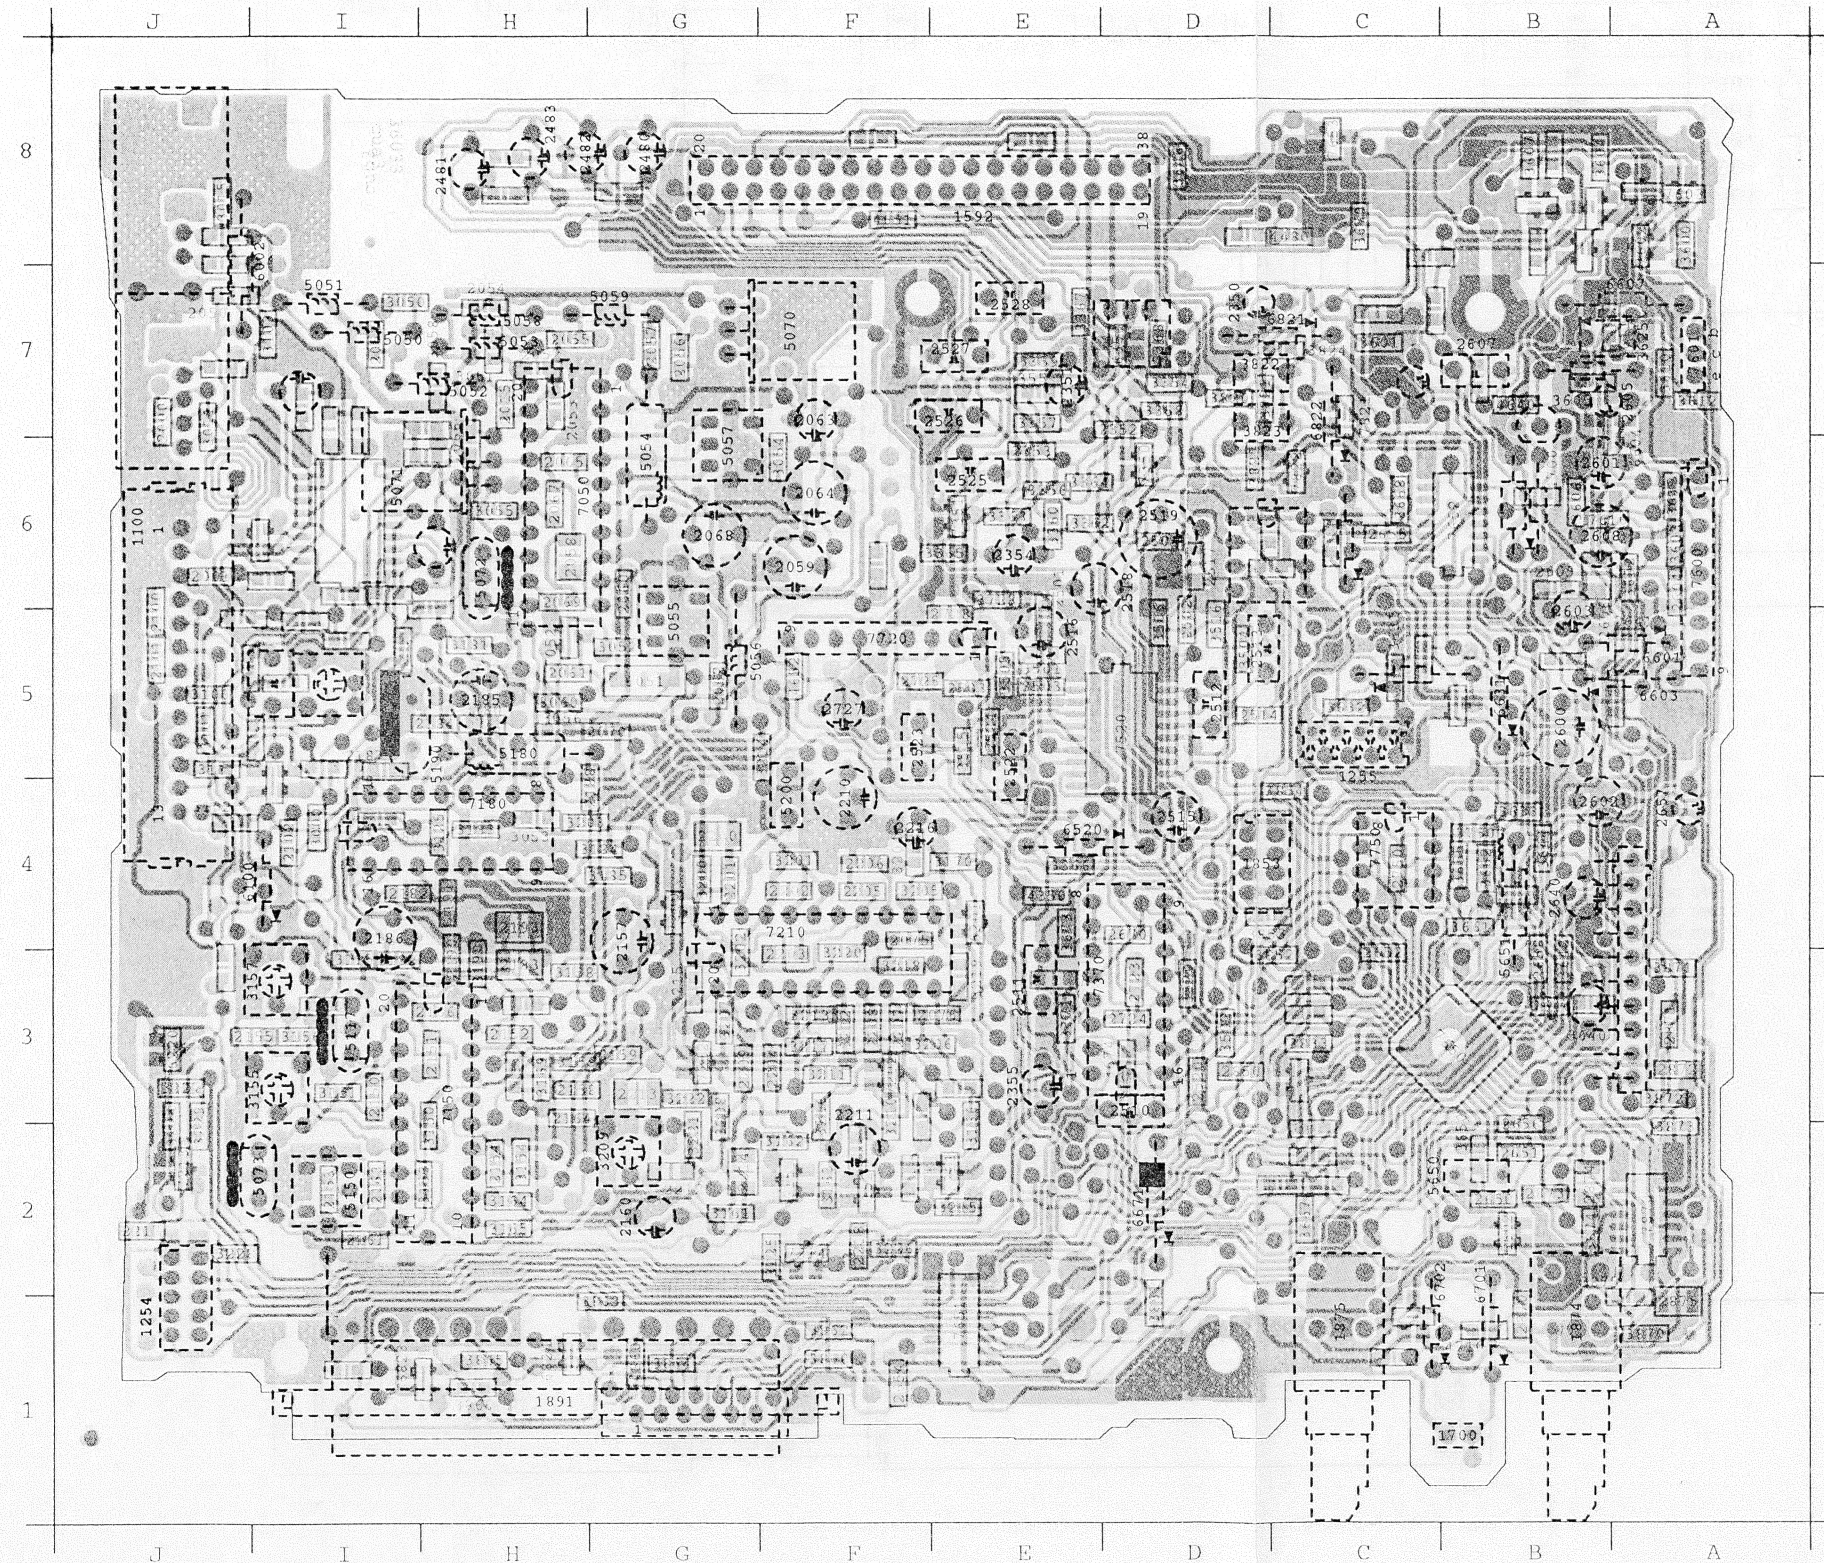


2000 J 7	2650 B 2	3216 F 3	3862 F 1
2001 J 6	2651 B 2	3217 F 3	3863 G 1
2015 H 7	2652 C 3	3218 F 3	3864 G 1
2050 J 7	2654 F 1	3219 E 3	3865 H 1
2051 I 7	2655 C 6	3220 F 3	3866 H 1
2052 H 7	2656 B 2	3221 G 2	3870 A 1
2053 H 7	2658 B 3	3222 G 3	3871 A 3
2054 H 7	2670 D 4	3224 J 2	3872 A 3
2055 H 7	2723 D 3	3225 F 2	3873 A 2
2056 G 7	2724 D 3	3226 F 2	3874 B 2
2057 G 7	2725 F 5	3227 J 3	3875 A 1
2058 H 6	2728 E 5	3228 J 2	4350 E 4
2060 G 6	2750 C 4	3229 J 2	4480 C 8
2061 H 5	2850 D 3	3354 D 7	4640 B 7
2062 G 5	2870 B 1	3355 E 7	4651 F 8
2065 H 6	2871 A 3	3356 E 6	4652 F 5
2066 H 6	2872 A 3	3357 E 7	4700 B 6
2067 H 6	2873 B 2	3358 D 7	4710 B 1
2069 H 6	2874 B 2	3359 E 7	4860 G 1
2070 G 5	2875 A 1	3360 E 6	6051 G 5
2075 F 4	3000 I 4	3362 E 6	6150 F 2
2076 E 3	3011 J 7	3363 E 6	6201 E 4
2100 J 5	3015 J 8	3364 E 6	6220 J 3
2101 J 5	3050 I 7	3365 E 6	6350 D 7
2102 I 4	3051 H 7	3366 E 4	6602 B 2
2150 I 3	3052 G 5	3367 E 7	6604 B 7
2151 H 3	3053 H 4	3368 D 7	6823 H 1
2152 H 3	3054 F 6	3370 D 3	6824 H 1
2153 I 2	3055 H 6	3371 E 3	7052 H 5
2154 H 2	3056 H 5	3501 E 5	7152 F 2
2155 I 3	3058 H 7	3502 D 3	7200 G 4
2156 H 3	3060 H 5	3503 E 5	7202 F 3
2158 H 3	3100 J 5	3504 D 5	7211 E 2
2159 G 3	3101 J 5	3505 E 5	7212 G 3
2161 I 2	3102 J 4	3506 D 5	7213 J 2
2163 I 2	3103 I 7	3515 E 5	7214 F 2
2164 H 3	3111 J 5	3516 D 5	7350 D 6
2180 H 5	3115 I 3	3600 A 8	7351 E 6
2182 I 4	3116 I 3	3601 C 7	7520 D 5
2183 H 3	3125 H 4	3602 A 6	7602 A 8
2184 H 5	3150 H 2	3603 A 6	7603 A 8
2187 I 5	3151 I 3	3604 B 8	7610 B 6
2188 H 4	3153 H 2	3605 B 7	7631 B 4
2190 H 3	3154 H 2	3606 B 6	7640 B 3
2191 H 4	3156 I 3	3607 B 8	7650 B 3
2193 H 4	3158 H 3	3610 A 7	7651 E 1
2200 G 4	3159 H 3	3611 B 7	7652 B 6
2201 G 4	3161 G 2	3612 A 7	7653 C 8
2202 F 4	3162 F 2	3613 A 6	7821 C 7
2203 F 3	3163 F 2	3631 C 5	7822 C 6
2204 F 3	3164 H 2	3632 C 5	7870 A 2
2205 F 4	3165 H 2	3633 B 4	
2206 F 4	3166 E 2	3640 B 3	
2207 F 3	3169 H 3	3642 B 3	
2208 F 3	3170 E 4	3644 B 4	
2209 G 3	3180 I 4	3646 D 8	
2212 G 2	3181 H 5	3650 B 2	
2213 G 3	3182 I 3	3655 B 4	
2214 G 2	3183 H 4	3661 B 4	
2215 G 3	3184 G 4	3662 H 4	
2217 J 3	3185 G 4	3667 C 2	
2218 F 2	3190 H 3	3668 C 6	
2252 D 7	3200 G 4	3670 C 8	
2253 E 6	3201 F 4	3673 E 4	
2501 B 5	3202 G 3	3674 D 3	
2502 D 5	3203 H 4	3728 E 6	
2503 E 5	3204 F 4	3750 B 4	
2504 D 6	3205 E 3	3820 D 7	
2544 D 5	3206 E 3	3821 D 7	
2547 D 6	3207 G 3	3824 C 7	
2520 D 3	3208 G 3	3825 D 6	
2521 E 3	3210 F 3	3833 C 3	
2524 E 5	3211 F 3	3852 C 3	
2604 A 6	3212 F 3	3853 D 8	
2606 B 6	3213 F 3	3854 C 3	
2609 B 6	3214 F 5	3860 F 1	
2641 A 5	3215 E 2	3861 D 1	

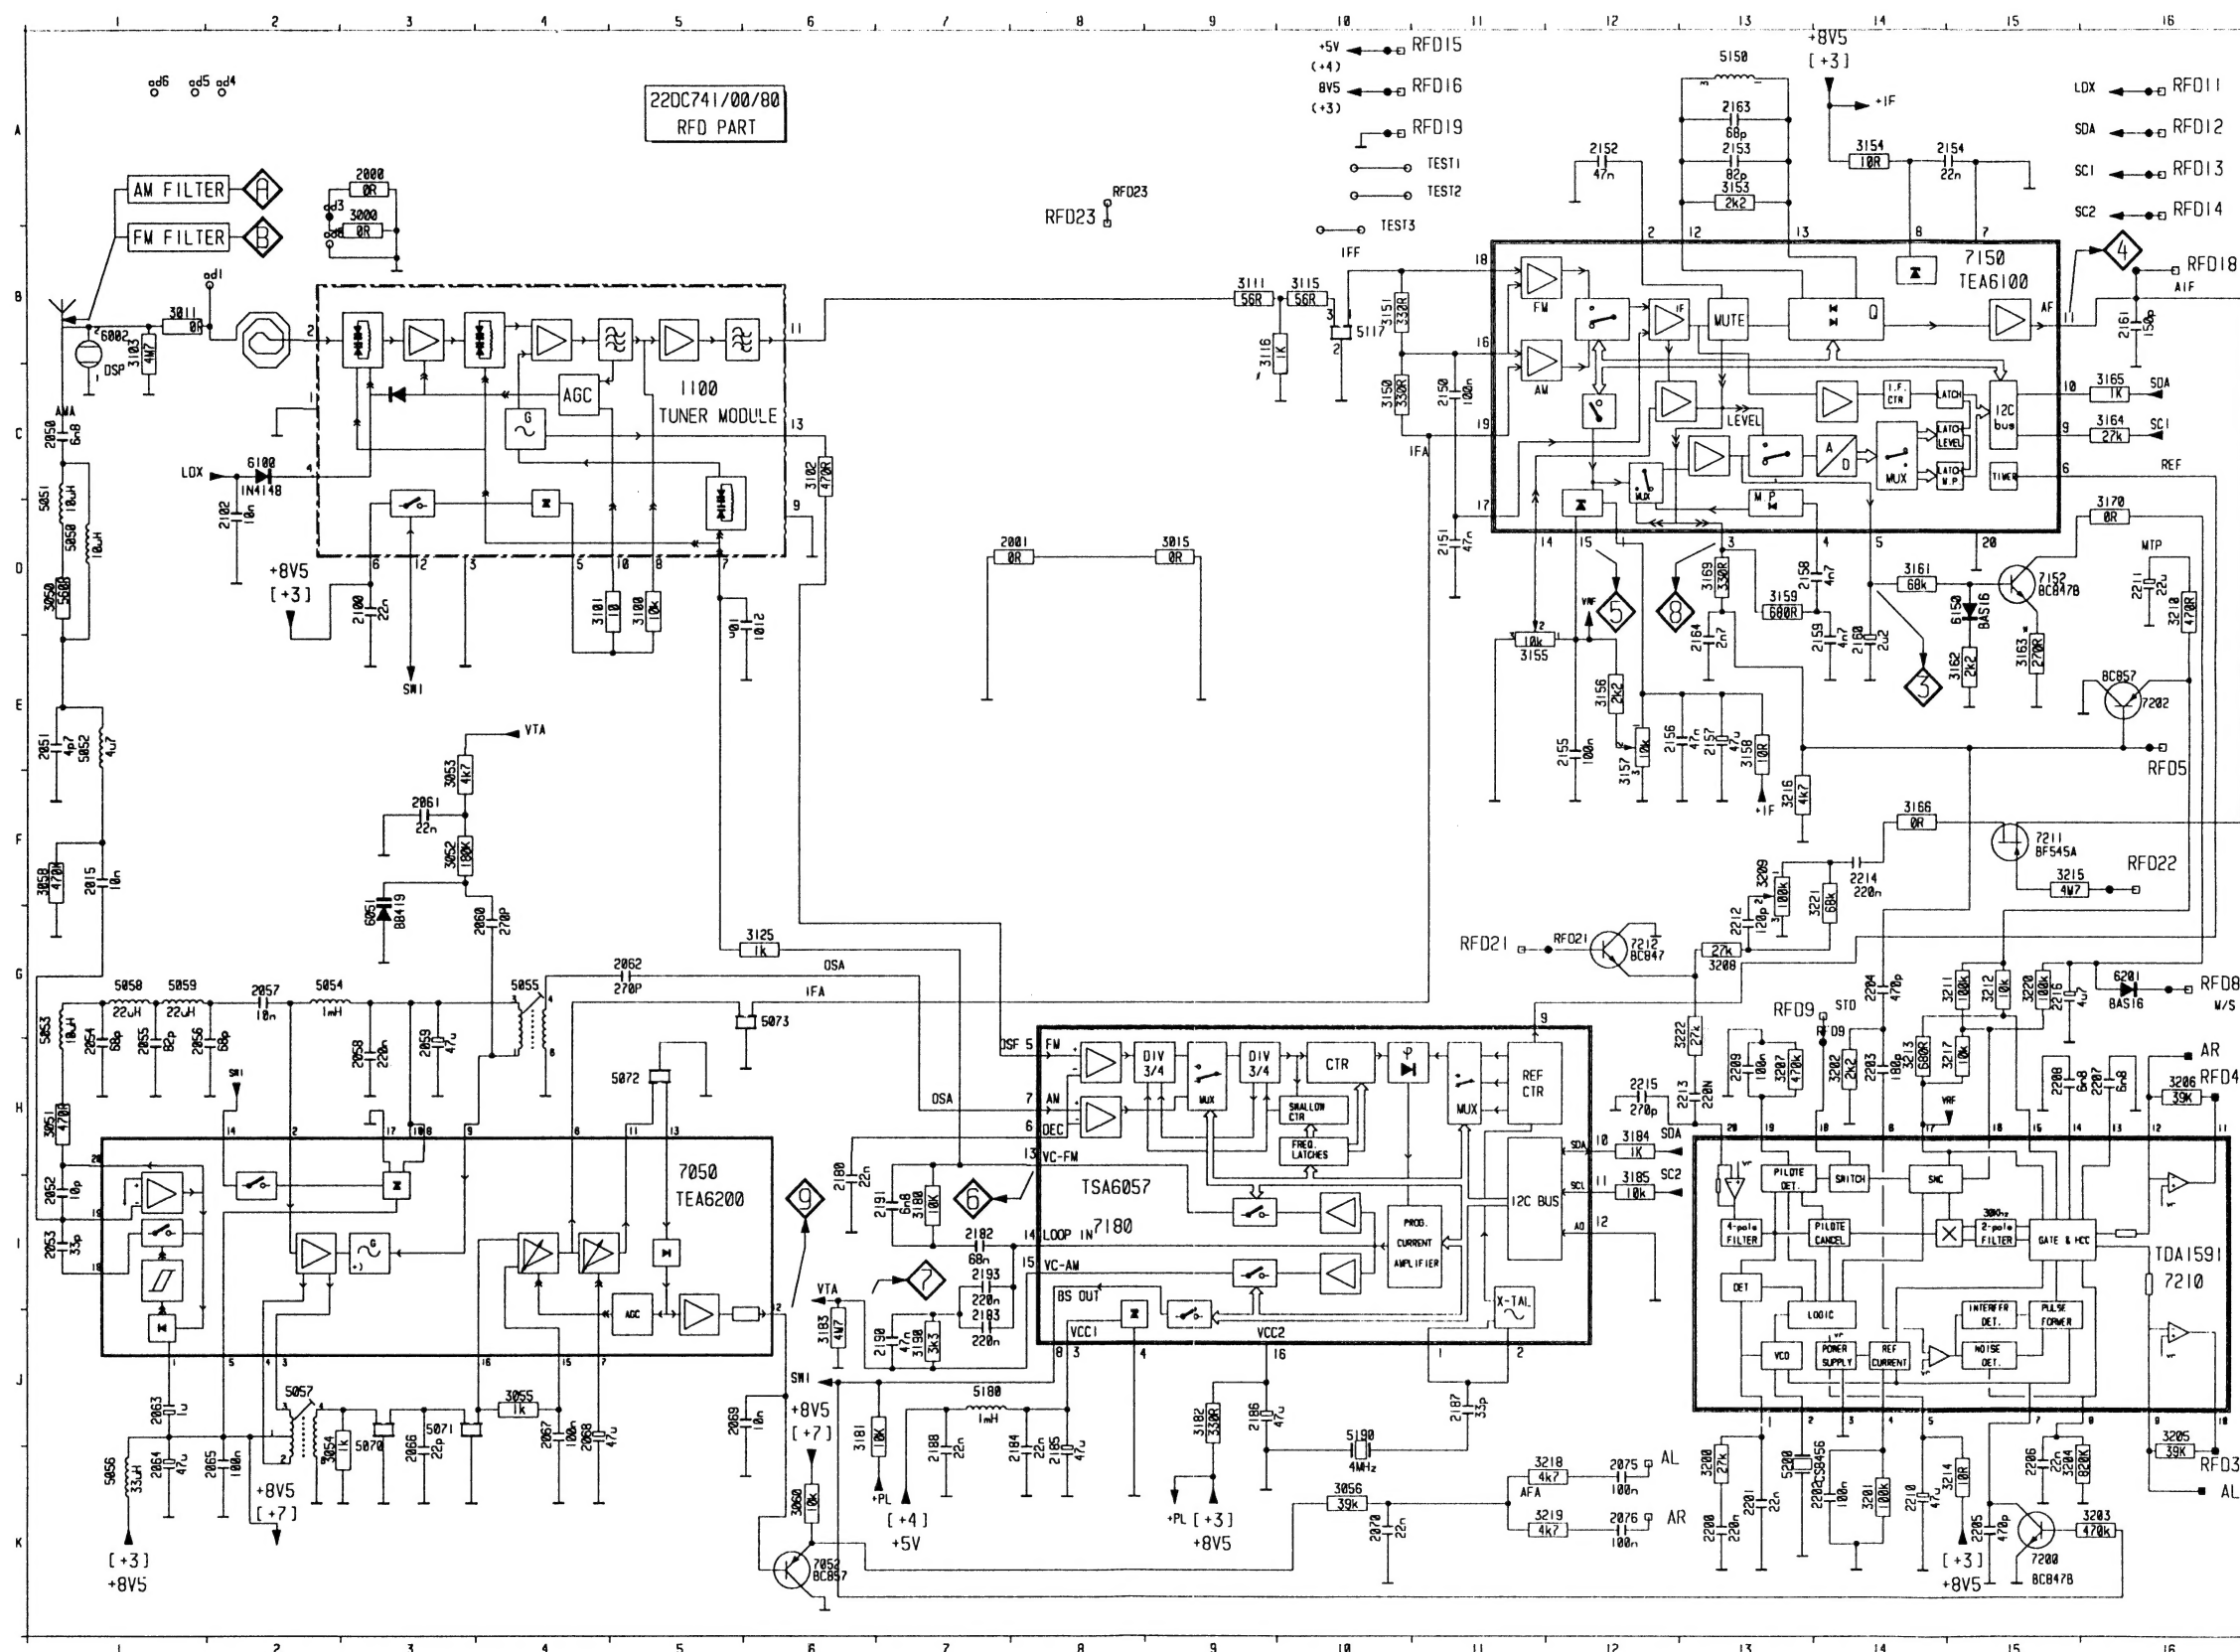

	1189	C 5
	2000	A 8
	2001	D 8
	2015	F 1
	2058	
A	2059	E 1
	2060	I 1
	2061	H 1
	2062	H 1
	2063	H 1
	2064	
	2065	
	2066	H 2
	2067	G 5
	2068	H 3
	2069	H 4
	2070	H 4
	2071	F 3
B	2072	G 5
	2073	I 1
	2074	K 2
	2075	K 3
	2076	J 4
	2077	J 4
	2078	J 6
	2079	K 10
	2080	K 12
C	2081	D 3
	2100	D 3
	2101	D 2
	2102	D 2
	2150	
	2151	D 11
	2152	D 12
	2153	A 13
	2154	A 15
D	2155	E 13
	2156	E 13
	2157	D 13
	2158	D 14
	2159	D 13
	2160	E 16
	2161	B 16
	2162	A 13
	2163	I 6
	2180	
E	2182	I 7
	2183	I 7
	2184	K 8
	2185	J 9
	2186	
	2187	J 11
	2188	K 7
	2190	J 7
	2191	I 7
	2193	
F	2200	K 13
	2201	K 13
	2202	K 14
	2203	H 14
	2204	G 14
	2205	
	2206	K 15
	2207	H 16
	2208	H 15
	2209	K 13
G	2210	H 14
	2211	H 12
	2212	G 13
	2213	H 13
	2214	H 12
	2215	H 15
	2216	A 3
	2217	
	2218	B 1
H	3011	D 9
	3015	
	3050	
	3054	I 1
	3055	F 3
	3056	K 2
	3057	
	3058	
	3059	
	3100	
I	3101	D 5
	3102	C 6
	3103	B 9
	3104	B 9
	3115	
	3116	B 9
	3125	B 10
	3150	G 18
J	3151	B 18
	3152	A 13
	3153	A 14
	3154	E 11
	3155	E 12
	3156	E 13
	3157	
	3158	
	3159	D 13
	3160	D 14
	3162	D 15
	3163	C 16
	3164	E 16
K	3165	C 16
	3166	D 14
	3167	D 15
	3170	D 16
	3180	I 7
	3181	J 9
	3182	J 6
	3183	H 12
	3184	H 12
	3185	

3198	J 7
3200	K 13
3201	X 14
3202	H 14
3203	K 15
3204	K 16
3205	J 16
3206	H 16
3207	H 18
3208	G 13
3209	F 13
3210	D 16
3211	H 16
3212	G 15
3213	H 14
3214	K 15
3215	F 15
3216	E 15
3217	H 16
3218	K 12
3219	K 12
3220	G 15
3221	F 14
3222	G 15
5851	C 1
5852	E 1
5853	G 1
5854	G 2
5855	G 4
5856	K 1
5857	J 2
5858	F 1
5859	G 1
5860	K 3
5871	J 3
5872	H 25
5873	G 6
5117	B 10
5150	A 13
5100	J 7
5190	J 10
5200	K 13
5802	B 1
6801	G 3
6100	C 15
6150	D 15
6201	C 16
7050	I 5
7052	K 6
7150	B 15
7152	D 15
7180	I 8
7200	K 10
7202	K 10
7210	I 16
7211	F 16
7212	G 12

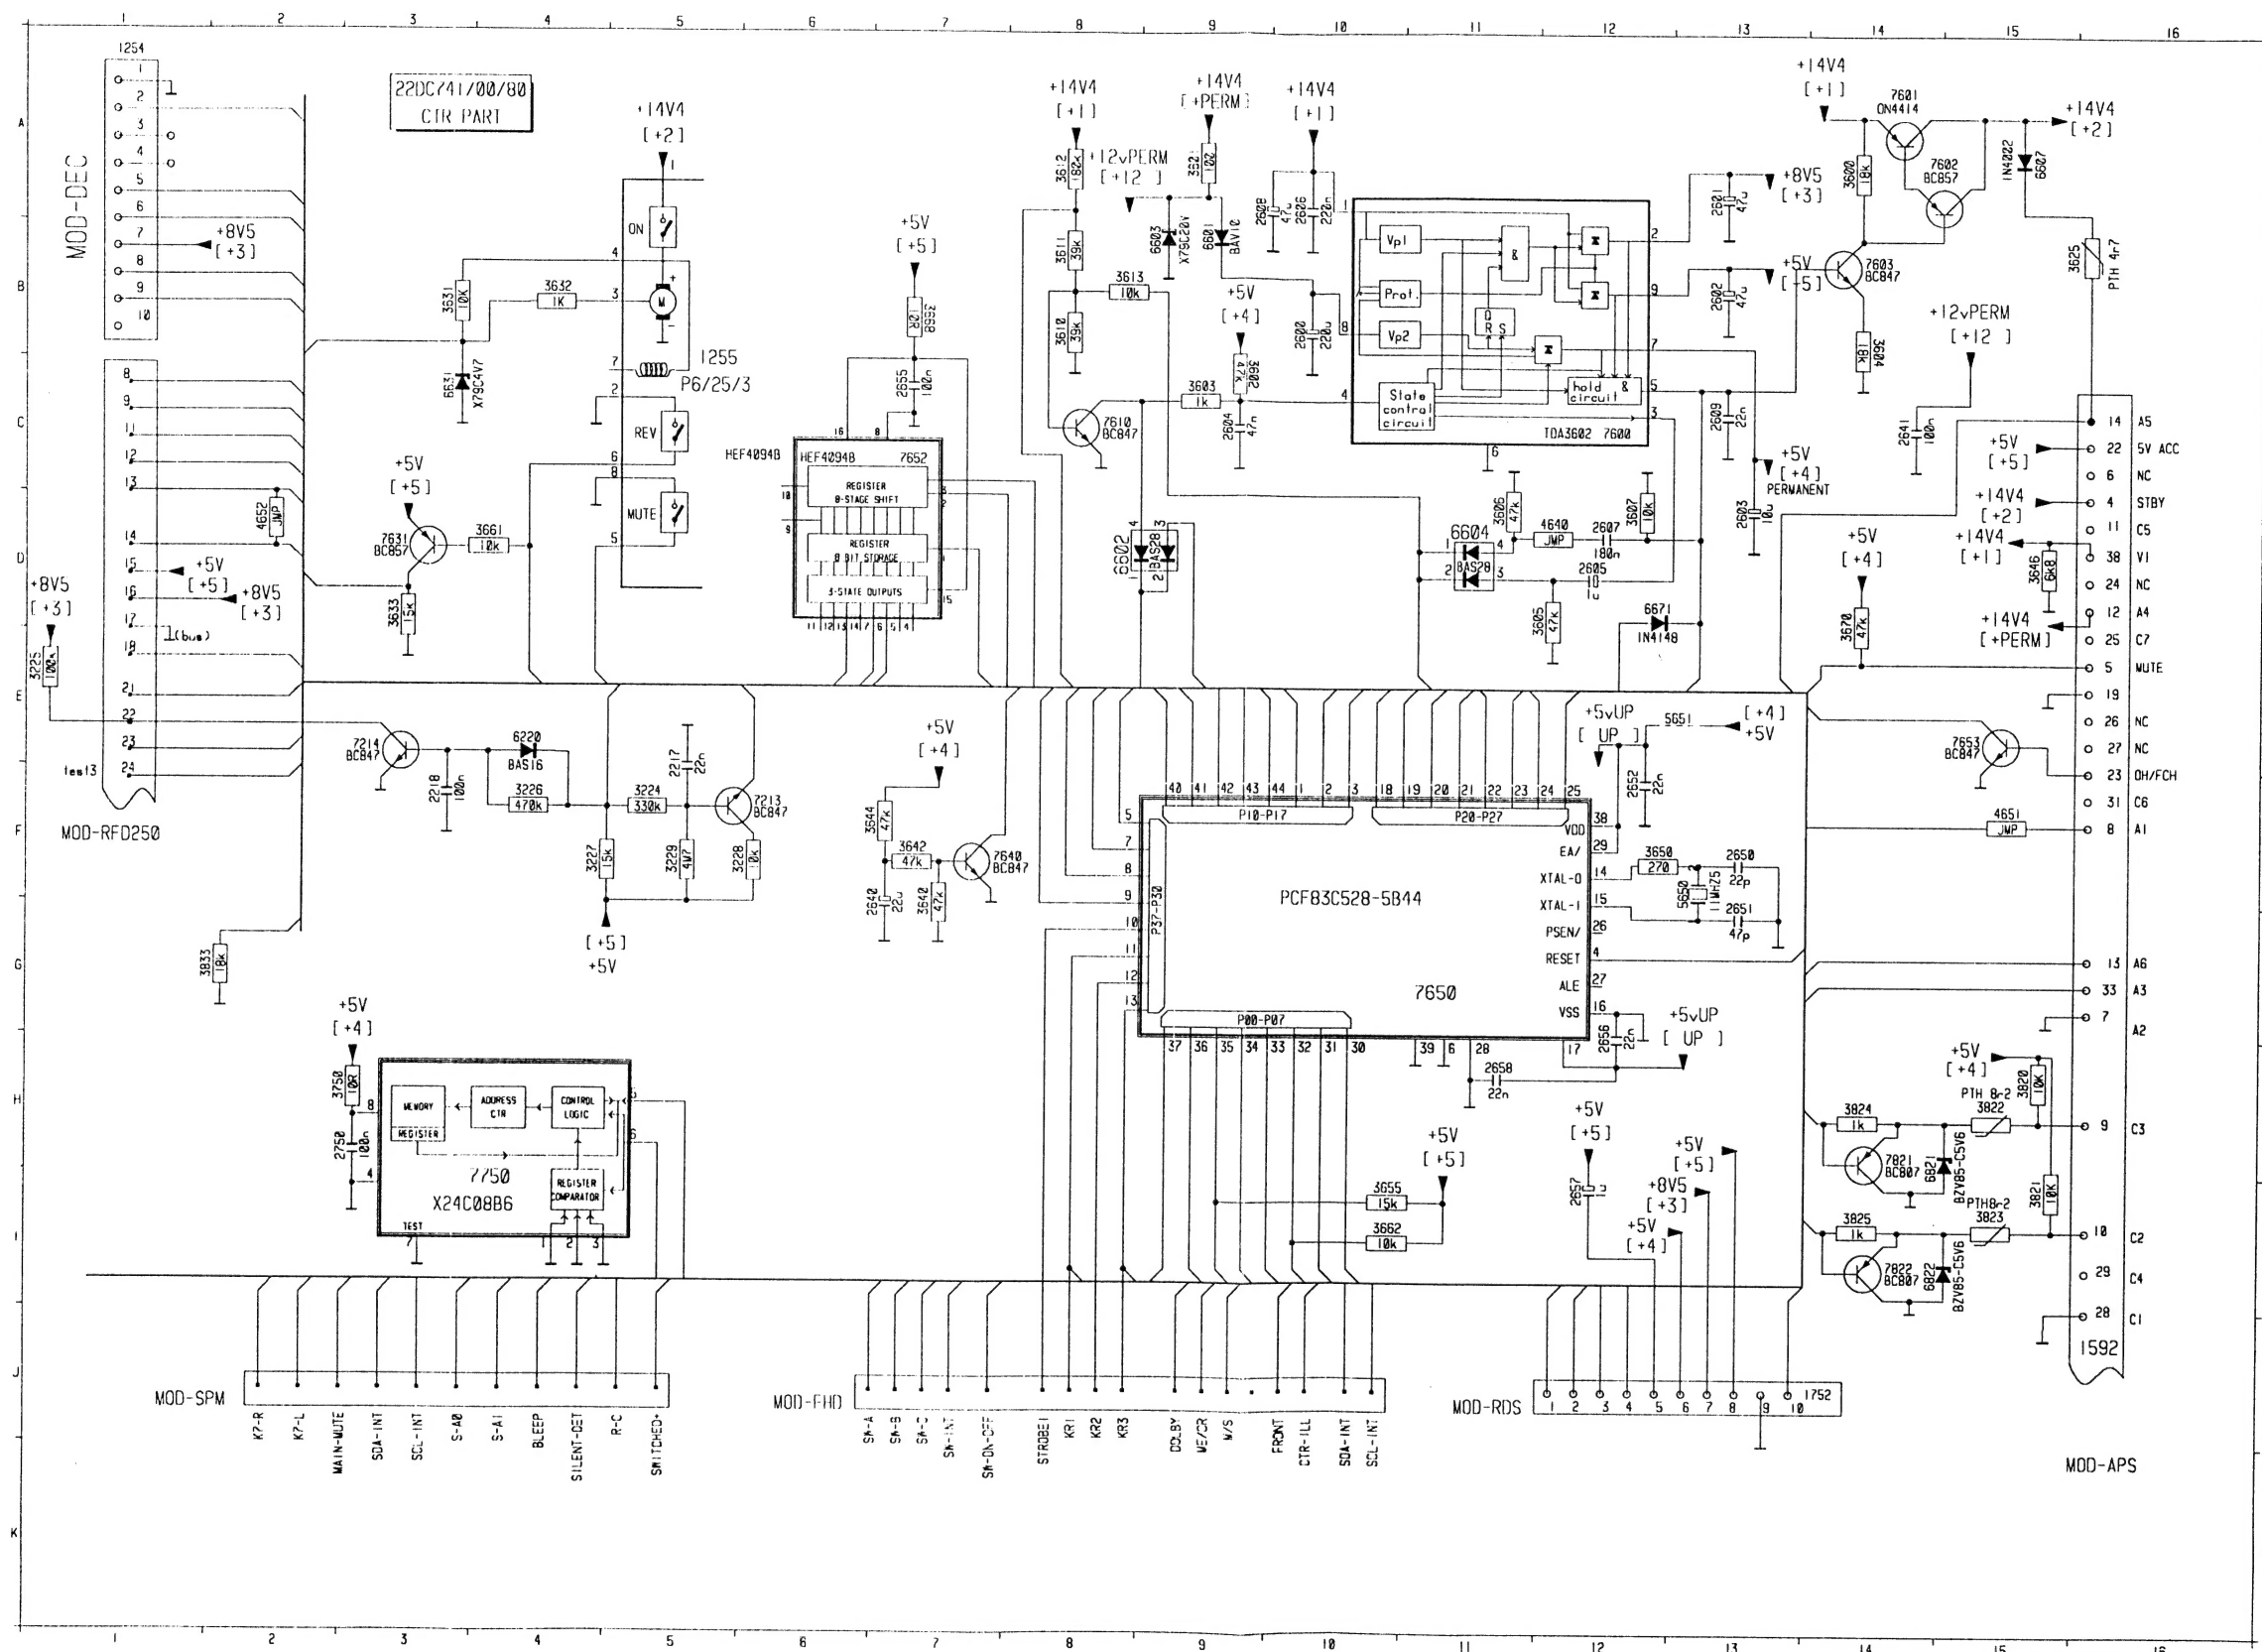

1254	A	1
1255	C	6
1592	D	6
1752	J	2
2217	E	5
2218	F	4
2600	B	10
2601	A	10
2602	B	10
2603	D	13
2604	C	12
2605	D	12
2606	A	12
2607	D	12
2608	A	10
2609	C	13
2610	F	7
2611	C	16
2612	F	16
2613	D	13
2614	F	12
2615	C	12
2616	H	3
2617	F	7
2618	C	12
2619	F	7
2620	F	7
2621	F	7
2622	F	7
2623	F	7
2624	F	7
2625	F	7
2626	F	7
2627	F	7
2628	F	7
2629	F	7
2630	F	7
2631	F	7
2632	F	7
2633	F	7
2634	F	7
2635	F	7
2636	F	7
2637	F	7
2638	F	7
2639	F	7
2640	F	7
2641	F	7
2642	F	7
2643	F	7
2644	F	7
2645	F	7
2646	F	7
2647	F	7
2648	F	7
2649	F	7
2650	F	7
2651	F	7
2652	F	7
2653	F	7
2654	F	7
2655	F	7
2656	F	7
2657	F	7
2658	F	7
2659	F	7
2660	F	7
2661	F	7
2662	F	7
2663	F	7
2664	F	7
2665	F	7
2666	F	7
2667	F	7
2668	F	7
2669	F	7
2670	F	7
2671	F	7
2672	F	7
2673	F	7
2674	F	7
2675	F	7
2676	F	7
2677	F	7
2678	F	7
2679	F	7
2680	F	7
2681	F	7
2682	F	7
2683	F	7
2684	F	7
2685	F	7
2686	F	7
2687	F	7
2688	F	7
2689	F	7
2690	F	7
2691	F	7
2692	F	7
2693	F	7
2694	F	7
2695	F	7
2696	F	7
2697	F	7
2698	F	7
2699	F	7
2700	F	7

For checking and adjusting see general procedures

Check	SK				Setting of controls		
Demodulated FM levels	FM	98 MHz 1 mV $\Delta f = 22.5$ KHz f mod = 1 KHz				135 mV \pm 1 dB	
		98 MHz 1 mV $\Delta f = 6.75$ KHz f mod = 19 KHz				40 mV \pm 1 dB	
		98 MHz 1 mV $\Delta f = 3.75$ KHz f mod = 57 KHz				18 mV \pm 2 dB	
Demodulated AM level	MW	1053 KHz 1 mV 1 KHz, 30% AM				250 mV \leq \leq 500 mV	
VC FM	FM			87.5 MHz		> 1.0 V	
				108 MHz		< 6.5 V	
VC AM	LW			144 KHz		> 0.8 V	
	MW			1611 KHz		< 6.5 V	
Search level AM	MW	990 KHz 70 μ V				1.75 V DC \pm 0.1 V	
FM mute		93 Mhz 1 mv				0 dB (775mV)	
		no signal				<-18 dB	

Adjustment	SK					
Quad detector	FM	93 MHz 40 μ V $\Delta f = 22.5$ KHz		93 MHz	5150	\leq 200mV
FM limiting sensivity	FM	93 MHz 13 μ V $\Delta f = 22.5$ KHz f mod = 1 KHz		93 MHz	3155	1.6 V \pm 0.1V
Search level AM	MW	990 KHz 70 μ V unmodulated		990 KHz	3175	1.75 V \pm 0.1V

ESD



WARNING

All ICs and many other semi-conductors are susceptible to electrostatic discharges (ESD). Careless handling during repair can reduce life drastically.
When repairing, make sure that you are connected with the same potential as the mass of the set via a wrist wrap with resistance. Keep components and tools also at this potential.

DC VOLTAGES

1100 TUNER MODULE

1 = GND	8 = 1.6 V
2 = 0.0 V	9 = GND
3 = GND	10 = 1.8 V
4 = 0.0 V	11 = 0.0 V
5 = 1.8 V FM / 0.0 V AM	12 = 8.5 V AM / 0.2 V FM
6 = 8.5 V	13 = 1.8 V
7 = 1.3 V - 5.7 V	

7050 TEA6200

1 = 6.3 V AM	11 = 6.9 V AM
2 = 4.0 V AM	12 = 2.9 V AM
3 = 8.5 V AM	13 = 5.0 V AM
4 = 8.5 V AM	14 = 8.5 V AM / 0.2 V FM
5 = 8.5 V AM	15 = 4.7 V AM
6 = 7.3 V AM	16 = 4.7 V AM
7 = 1.4 V AM	17 = GND
8 = 4.0 V AM	18 = 5.7 V AM
9 = 4.0 V AM	19 = 1.0 V AM
10 = 4.0 V AM	20 = 5.7 V AM

7150 TEA 6100

1 = 8.5 V	11 = 4.3 V
2 = 0.7V	12 = 4.5 V
3 = 2.6 V - 5.0 V	13 = 4.5 V
4 = 0.0 V	14 = 2.5 V
5 = 2.0 V	15 = 4.3 V
6 = 0.2 V	16 = 2.9 V
7 = GND	17 = 2.9 V
8 = 8.5 V	18 = 2.9 V
9 = 4.8 V SCL	19 = 2.9 V
10 = 4.8 V SDA	20 = GND

7180 TSA6057

1 = 4 MHz	9 = 0.3 V
2 = 4 MHz	10 = 4.7 V SDA
3 = 4.7 V	11 = 4.7 V SCL
4 = GND	12 = GND
5 = 1.8 V	13 = 1.3 V - 5.7 V FM
6 = 1.5 V	14 = 2.1 V
7 = 1.8 V	15 = 1.9 V - 3.4 V AM
8 = 0.2 V FM / 8.5 V AM	16 = 8.4 V

7210 TDA1591

1 = 4.7 V	11 = 3.8 V
2 = 5 MHz	12 = 3.8 V
3 = GND	13 = 3.8 V
4 = 3.0 V	14 = 3.8 V
5 = 8.5 V	15 = 4.3 V
6 = 2.3 V	16 = 4.3 V
7 = 2.2 V	17 = 4.3 V
8 = 2.1 V	18 = 4.8 V
9 = 3.8 V	19 = 4.8 V
10 = 3.8 V	20 = 3.0 V

7370 HEF 4052BT

1 = 3.1 V	9 = 4.8 V
2 = 2.7 V	10 = GND
3 = 3.7 V	11 = GND
4 = GND	12 = 3.0 V
5 = GND	13 = 3.7 V
6 = 0.0 V	14 = GND
7 = GND	15 = 3.2 V
8 = GND	16 = 7.3 V

7500 TDA1526

1 = 7.7 V	11 = 5.0 V
2 = 3.9 V	12 = 5.0 V
3 = GND	13 = 3.9 V
4 = 3.9 V	14 = 3.9 V
5 = 3.9 V	15 = 3.9 V
6 = 3.9 V	16 = 3.9 V
7 = 3.9 V	17 = 3.9 V
8 = 3.9 V	18 = 7.8 V
9 = 5.0 V	19 = 3.9 V
10 = GND	20 = 3.9 V

7651 HEF4094B

1 = 0.0 V	9 = N.C.
2 = 4.7 V	10 = N.C.
3 = 4.8 V	11 = 0.0 V Mono/ 5.0 V Stereo
4 = 0.0 V	12 = 0.0 V / 5.0 V ME/CR
5 = 0.0 V	13 = 0.0 V / 5.0 V Dolby
6 = 0.0 V	14 = N.C.
7 = 0.0 V	15 = 5.0 V
8 = GND	16 = 5.0 V

7651 HEF4094B


1 = 0.0 V	9 = N.C.
2 = 5.0 V	10 = N.C.
3 = 5.0 V	11 = N.C.
4 = N.C.	12 = N.C.
5 = N.C.	13 = 0.0 V
6 = 5.0 V	14 = N.C.
7 = 5.0 V	15 = 5.0 V
8 = GND	16 = 5.0 V

7750 X24C08B6

1 = GND	5 = 4.8 V SDA
2 = GND	6 = 4.8 V SCL
3 = GND	7 = GND
4 = GND	8 = 5 V


7720 LA2000

1 = 2.0 V	6 = 4.8 V
2 = 8.0 V	7 = N.C.
3 = 2.0 V	8 = N.C.
4 = N.C.	9 = 8.5 V
5 = GND	

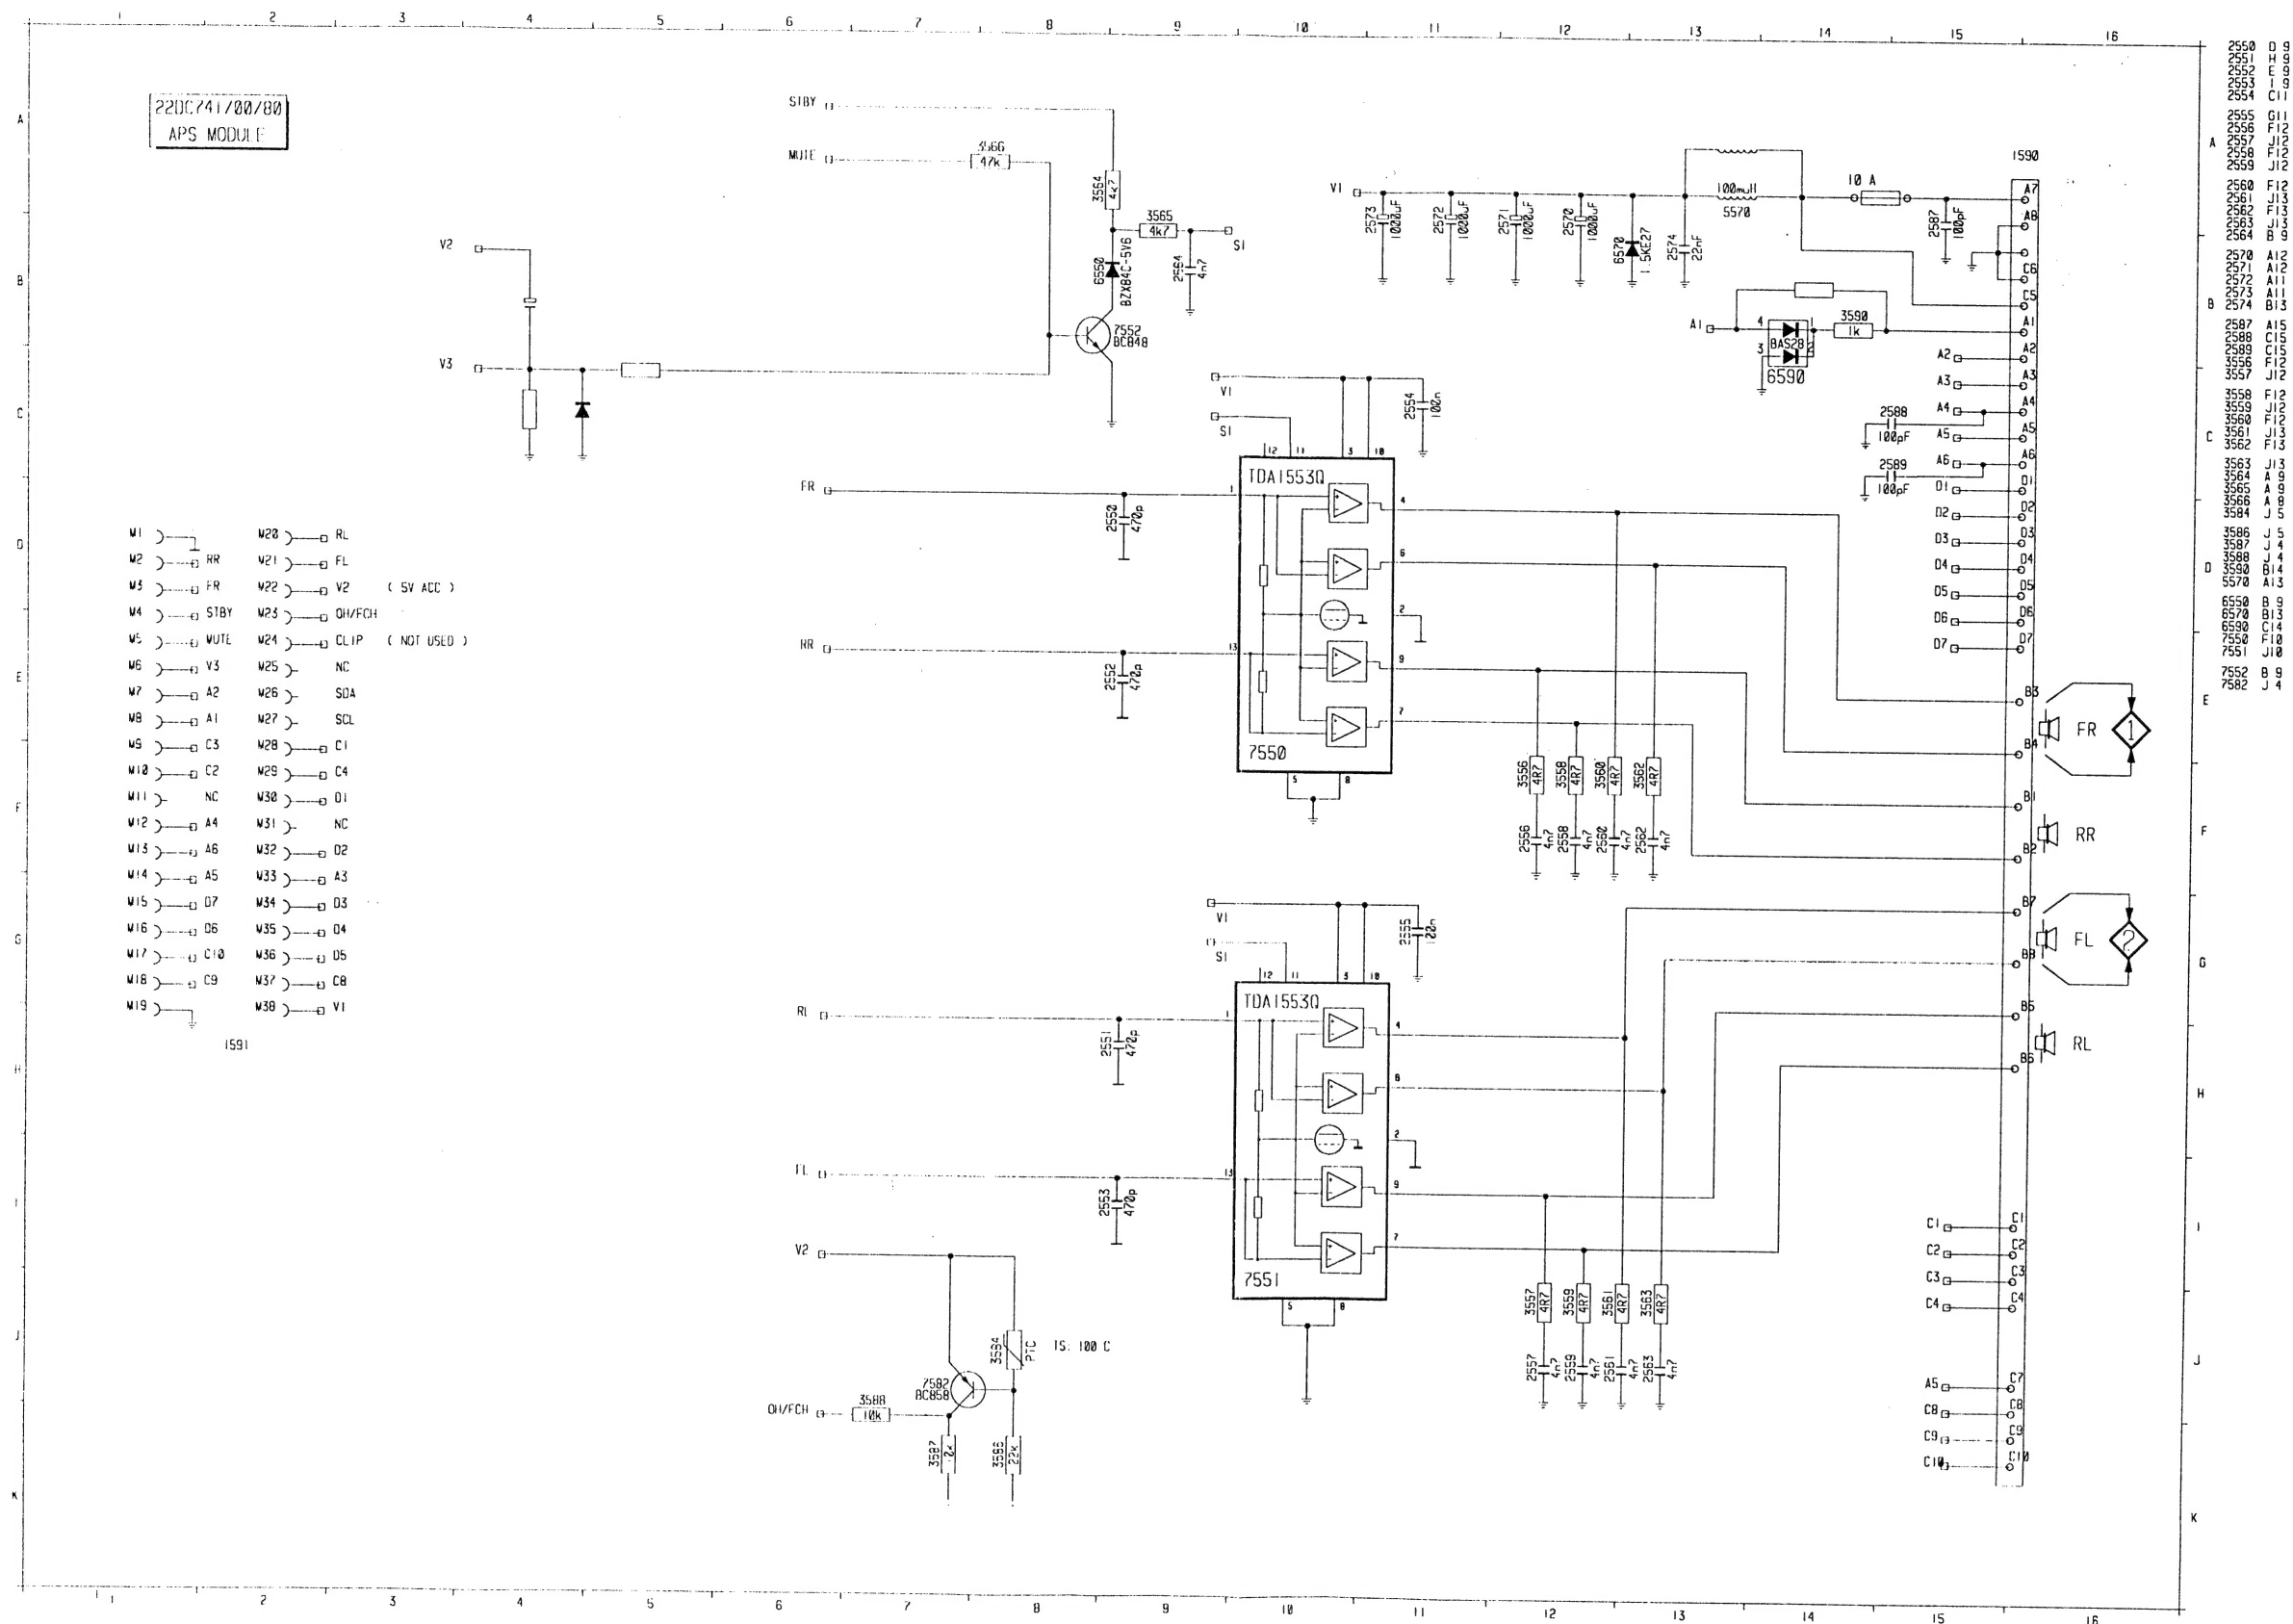

Power Module


1590 B 2	2571 F 2	3584 H 2	7550 H 1
1591 F 2	2572 G 2	5570 D 1	7551 F 1
2570 E 2	2573 H 2	6570 G 2	

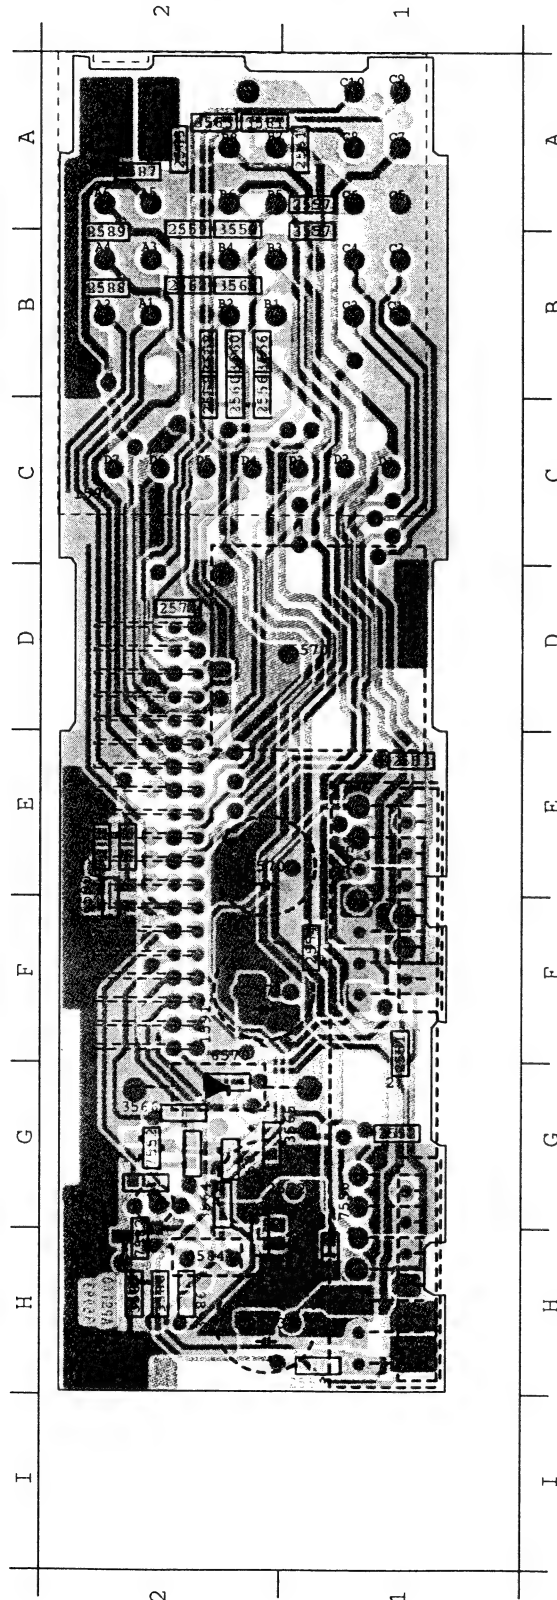


1590 B 2
1591 F 2
2570 E 2
2571 F 2
2572 G 2
2573 H 2
3584 H 2
5570 D 1
6570 G 2
7550 H 1
7551 F 1


RDS Module

1950 C 4 2702 B 5 5700 C 5 5762 C 4

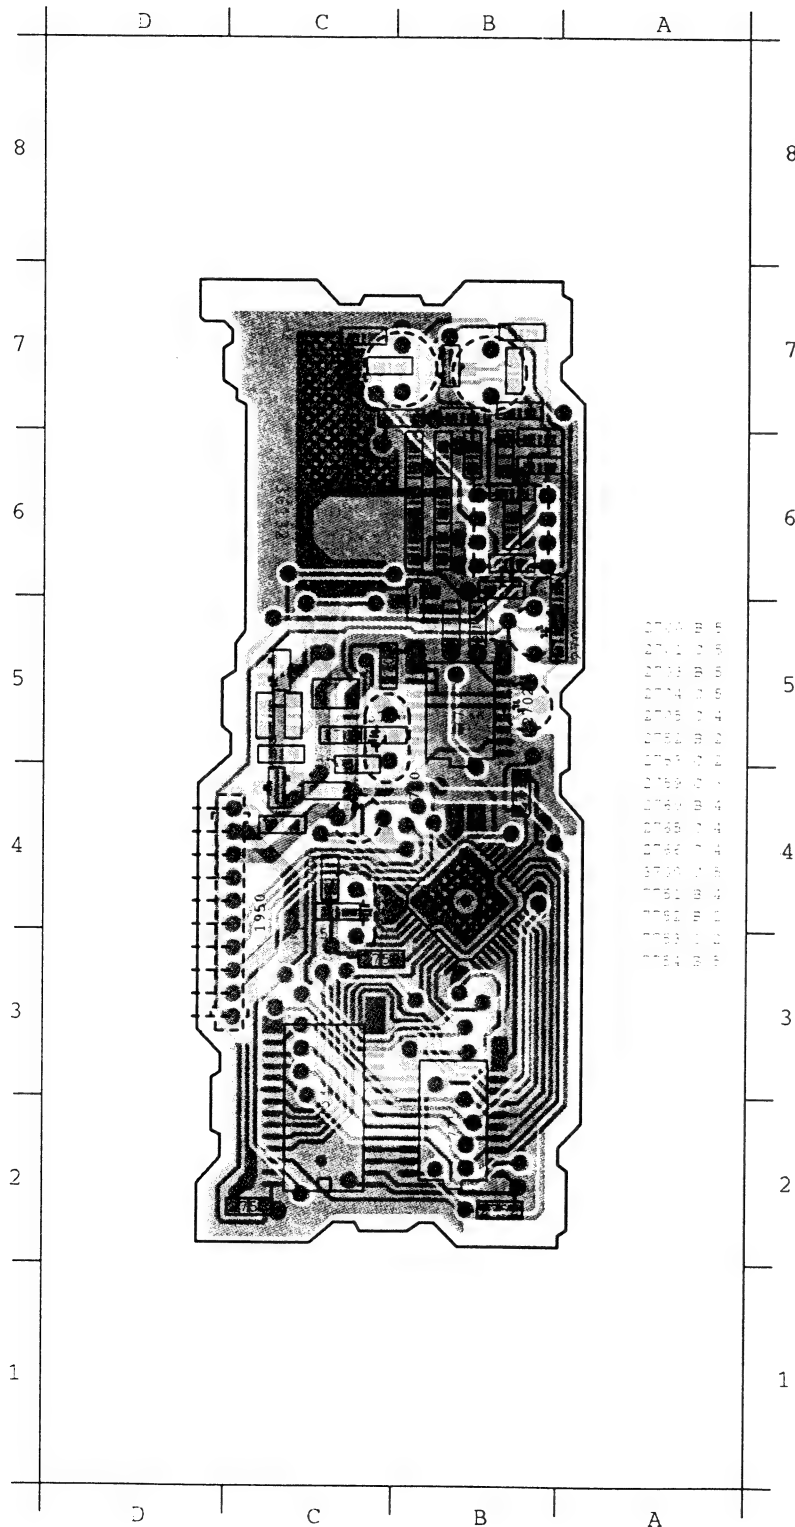

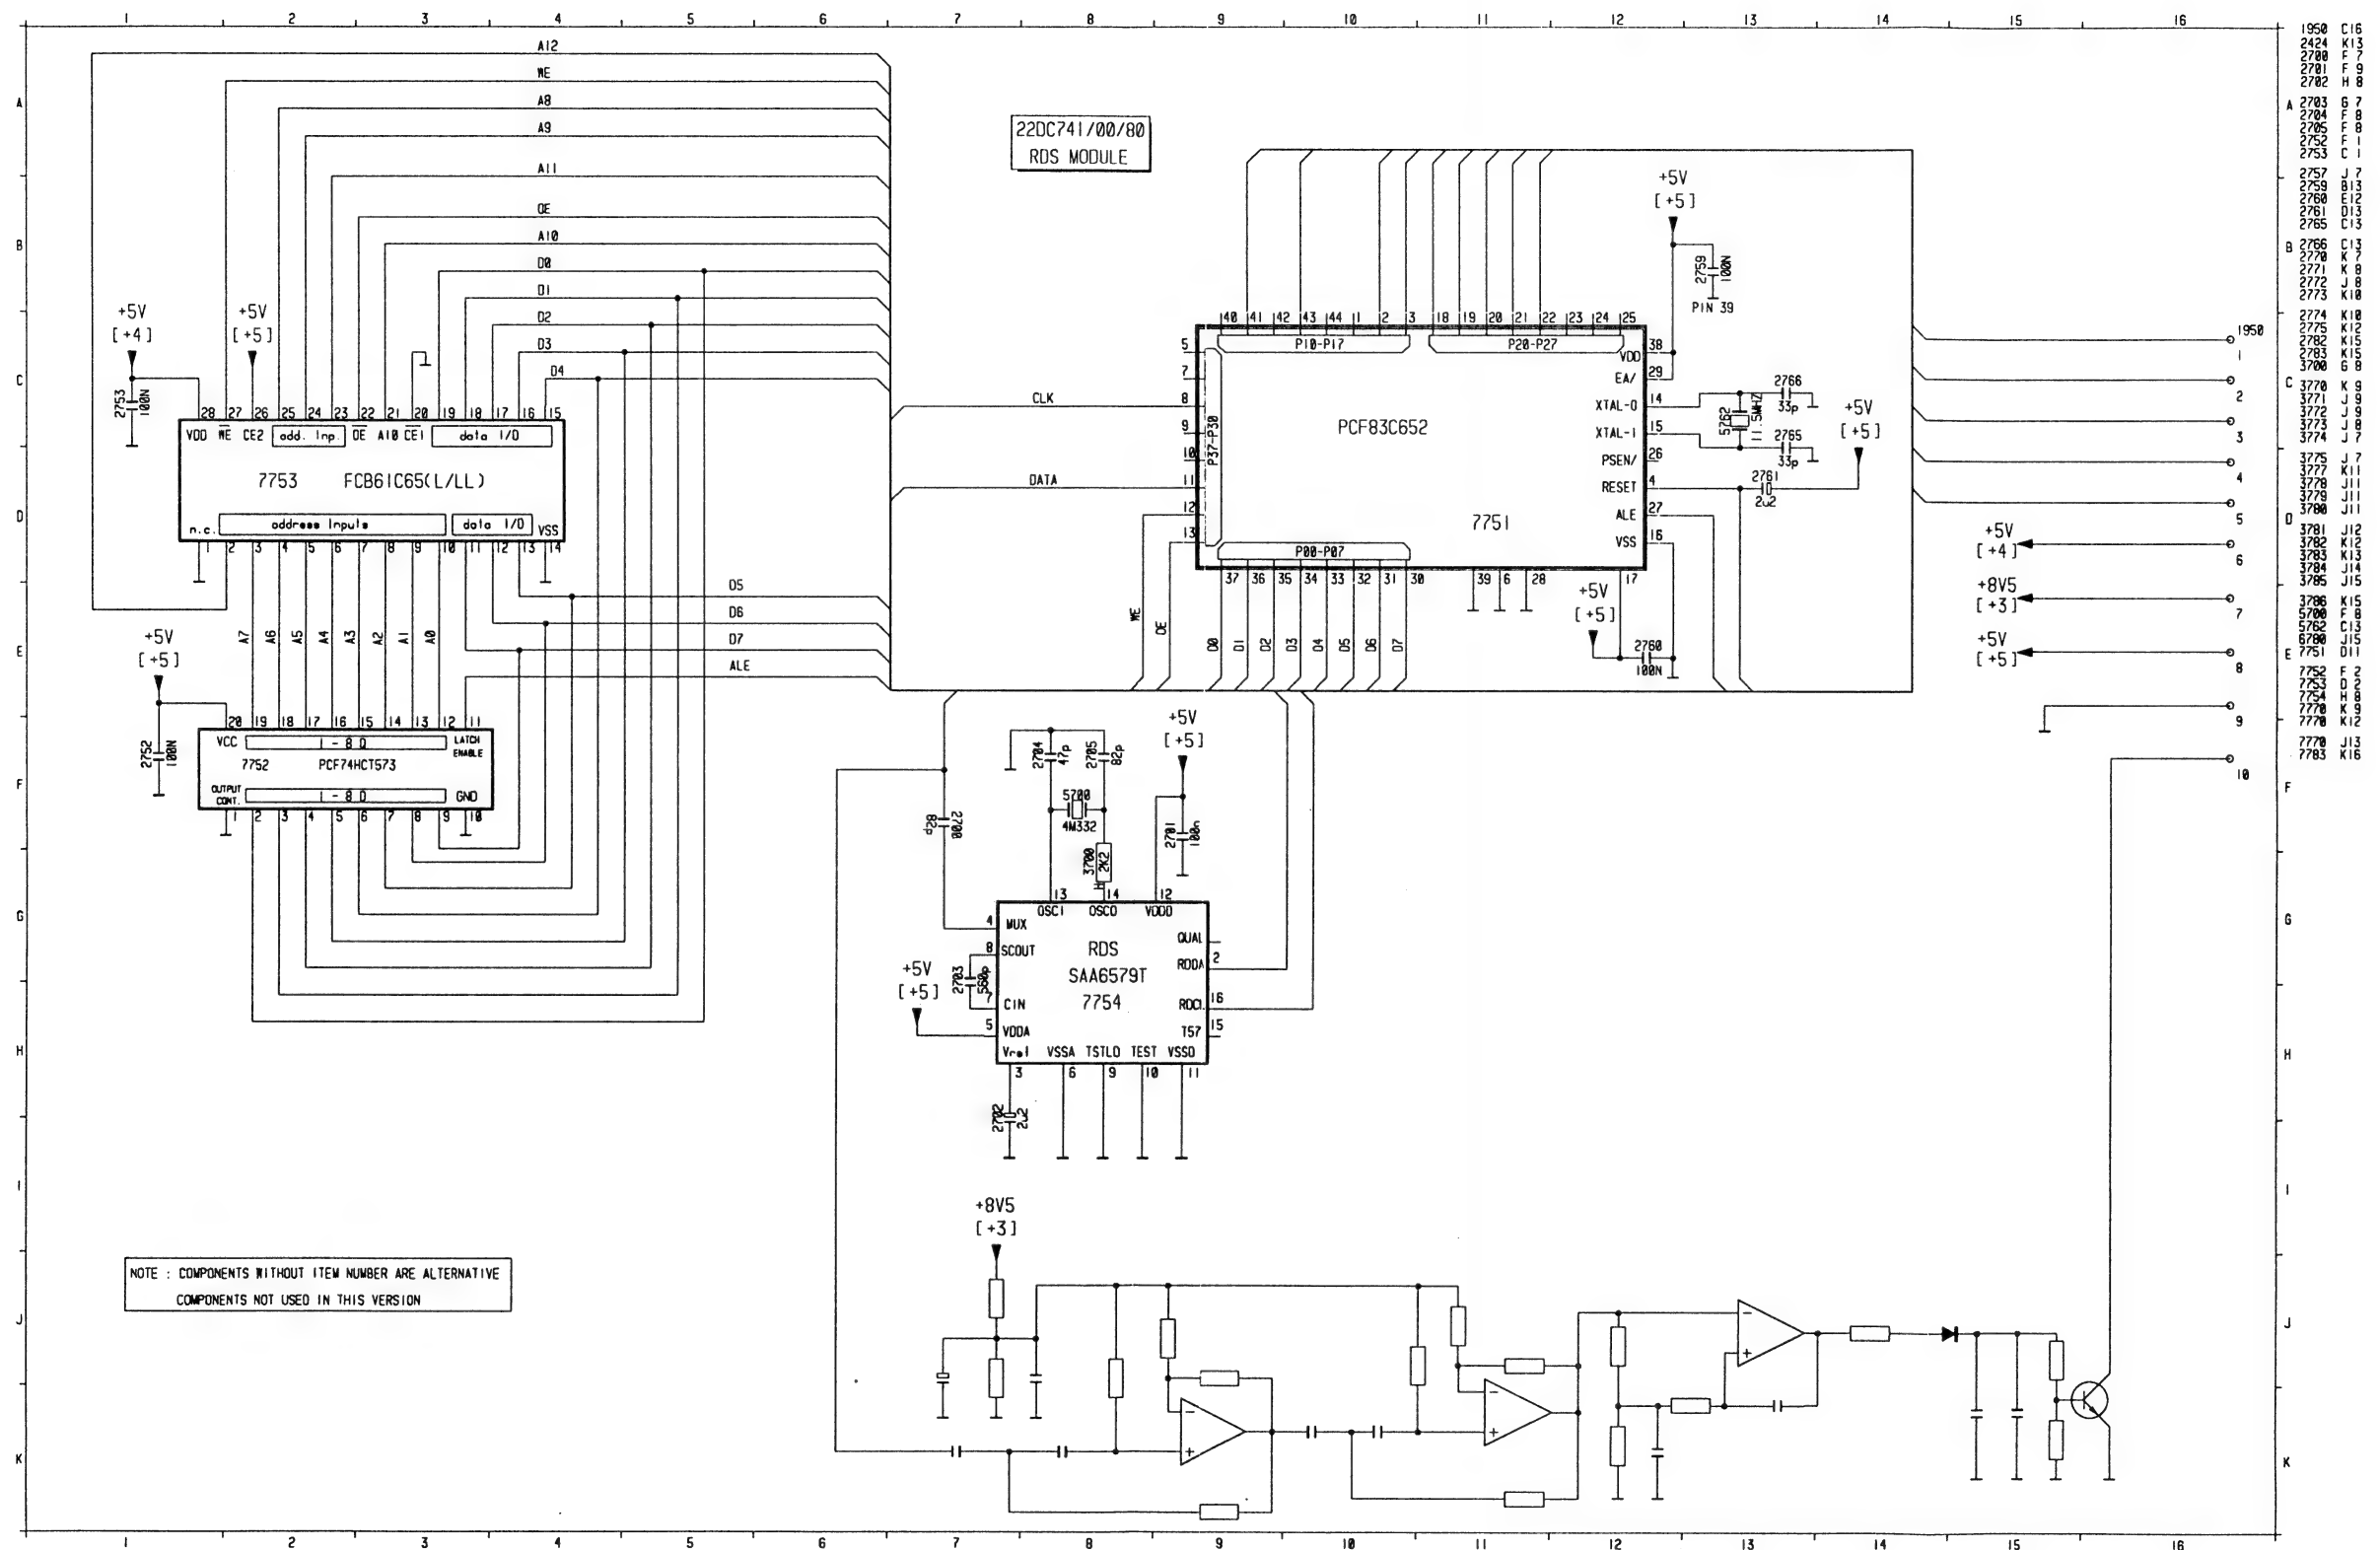


1950	C16
2424	K13
2700	F7
2701	F9
2702	H8
2703	G7
2704	F8
2705	F1
2706	C1
2707	J7
2708	B13
2709	E12
2710	D13
2711	C13
2712	K13
2713	K7
2714	K8
2715	J8
2716	K10
2717	K10
2718	K10
2719	K10
2720	K10
2721	K10
2722	K10
2723	K10
2724	K10
2725	K10
2726	K10
2727	K10
2728	K10
2729	K10
2730	K10
2731	K10
2732	K10
2733	K10
2734	K10
2735	K10
2736	K10
2737	K10
2738	K10
2739	K10
2740	K10
2741	K10
2742	K10
2743	K10
2744	K10
2745	K10
2746	K10
2747	K10
2748	K10
2749	K10
2750	K10
2751	K10
2752	K10
2753	K10
2754	K10
2755	K10
2756	K10
2757	K10
2758	K10
2759	K10
2760	K10
2761	K10
2762	K10
2763	K10
2764	K10
2765	K10
2766	K10
2767	K10
2768	K10
2769	K10
2770	K10
2771	K10
2772	K10
2773	K10
2774	K10
2775	K10
2776	K10
2777	K10
2778	K10
2779	K10
2780	K10
2781	K10
2782	K10
2783	K10
2784	K10
2785	K10
2786	K10
2787	K10
2788	K10
2789	K10
2790	K10
2791	K10
2792	K10
2793	K10
2794	K10
2795	K10
2796	K10
2797	K10
2798	K10
2799	K10

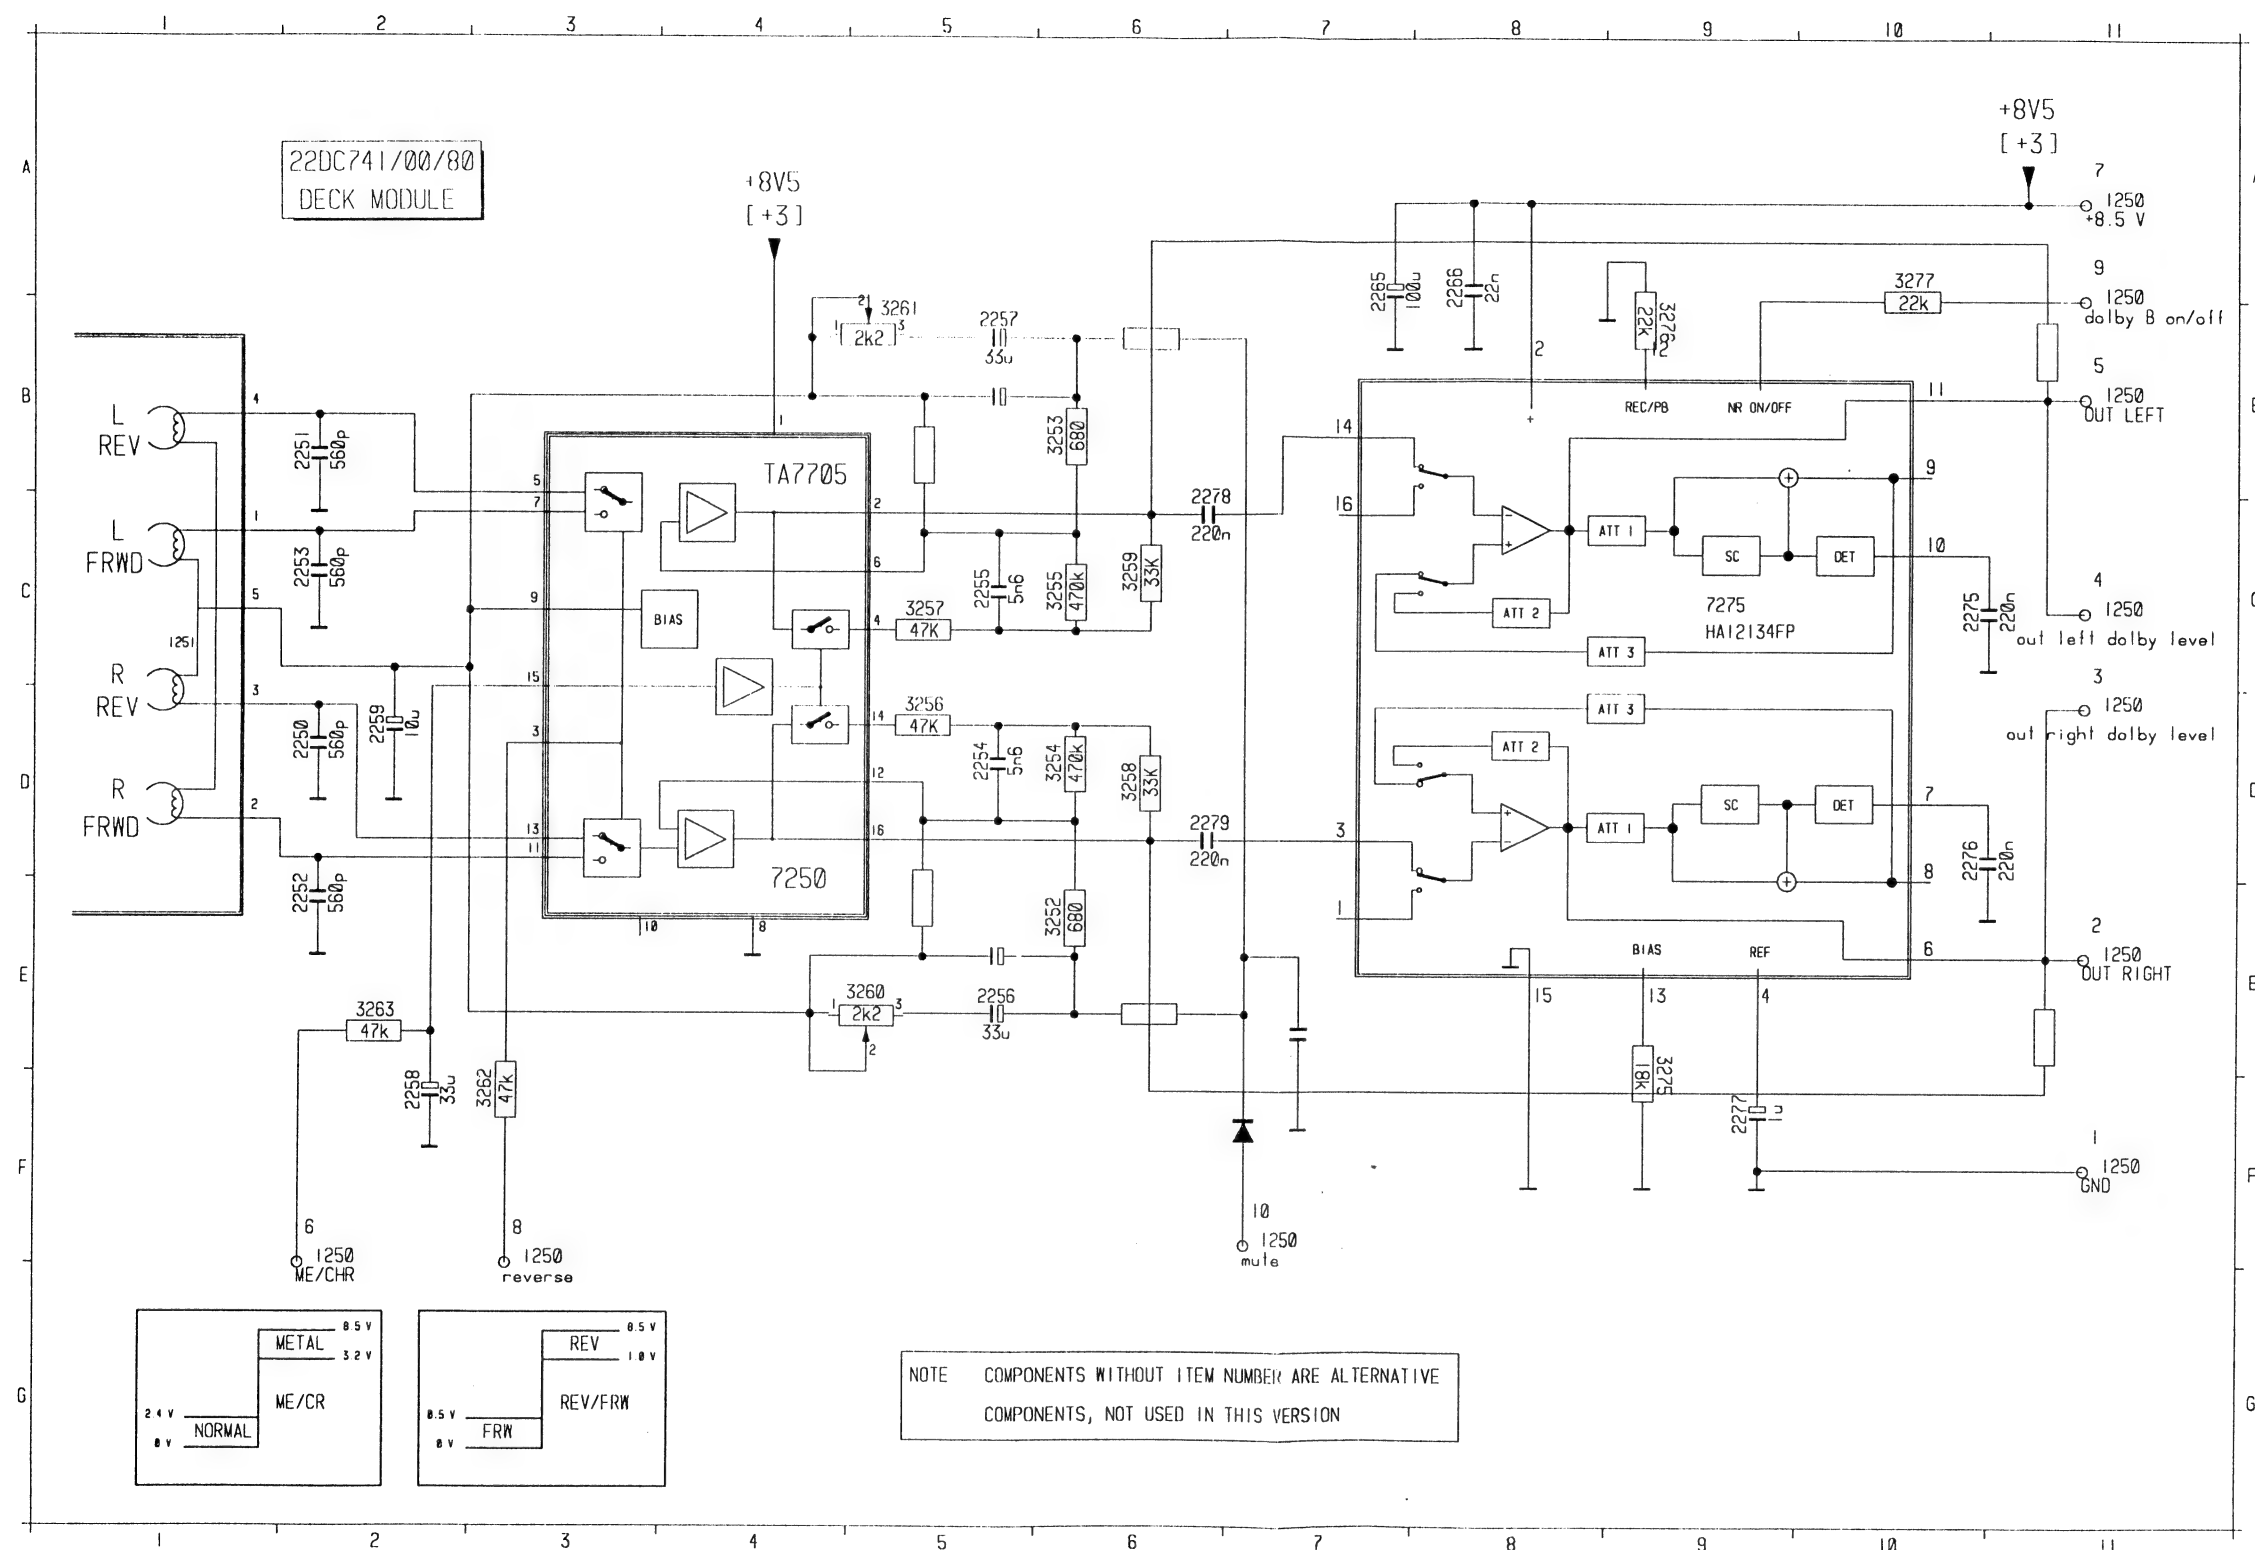


- 1251 C 1
- 2250 C 2
- 2251 B 2
- 2252 F 2
- 2253 C 2
- 2254 D 5
- 2255 C 5
- 2256 F 5
- 2257 B 2
- 2258 F 2
- 2259 D 2
- 2262 F 7
- 2265 A 7
- 2266 B 5
- 2268 B 5
- 2269 F 5
- 2275 C 10
- 2276 D 10
- 2277 F 6
- 2278 C 6
- 2279 D 6
- 3250 F 5
- 3251 B 5
- 3252 F 6
- 3253 B 6
- 3254 D 6
- 3255 C 6
- 3256 D 5
- 3257 C 5
- 3258 D 5
- 3259 C 6
- 3260 F 5
- 3261 B 5
- 3262 F 3
- 3263 F 2
- 3264 F 6
- 3265 B 5
- 3275 F 9
- 3276 B 9
- 3277 A 10
- 4250 E 11
- 4251 B 11
- 7250 F 7
- 7251 F 7
- 7275 C 9

PCS 67 588




PCS 67 588







15



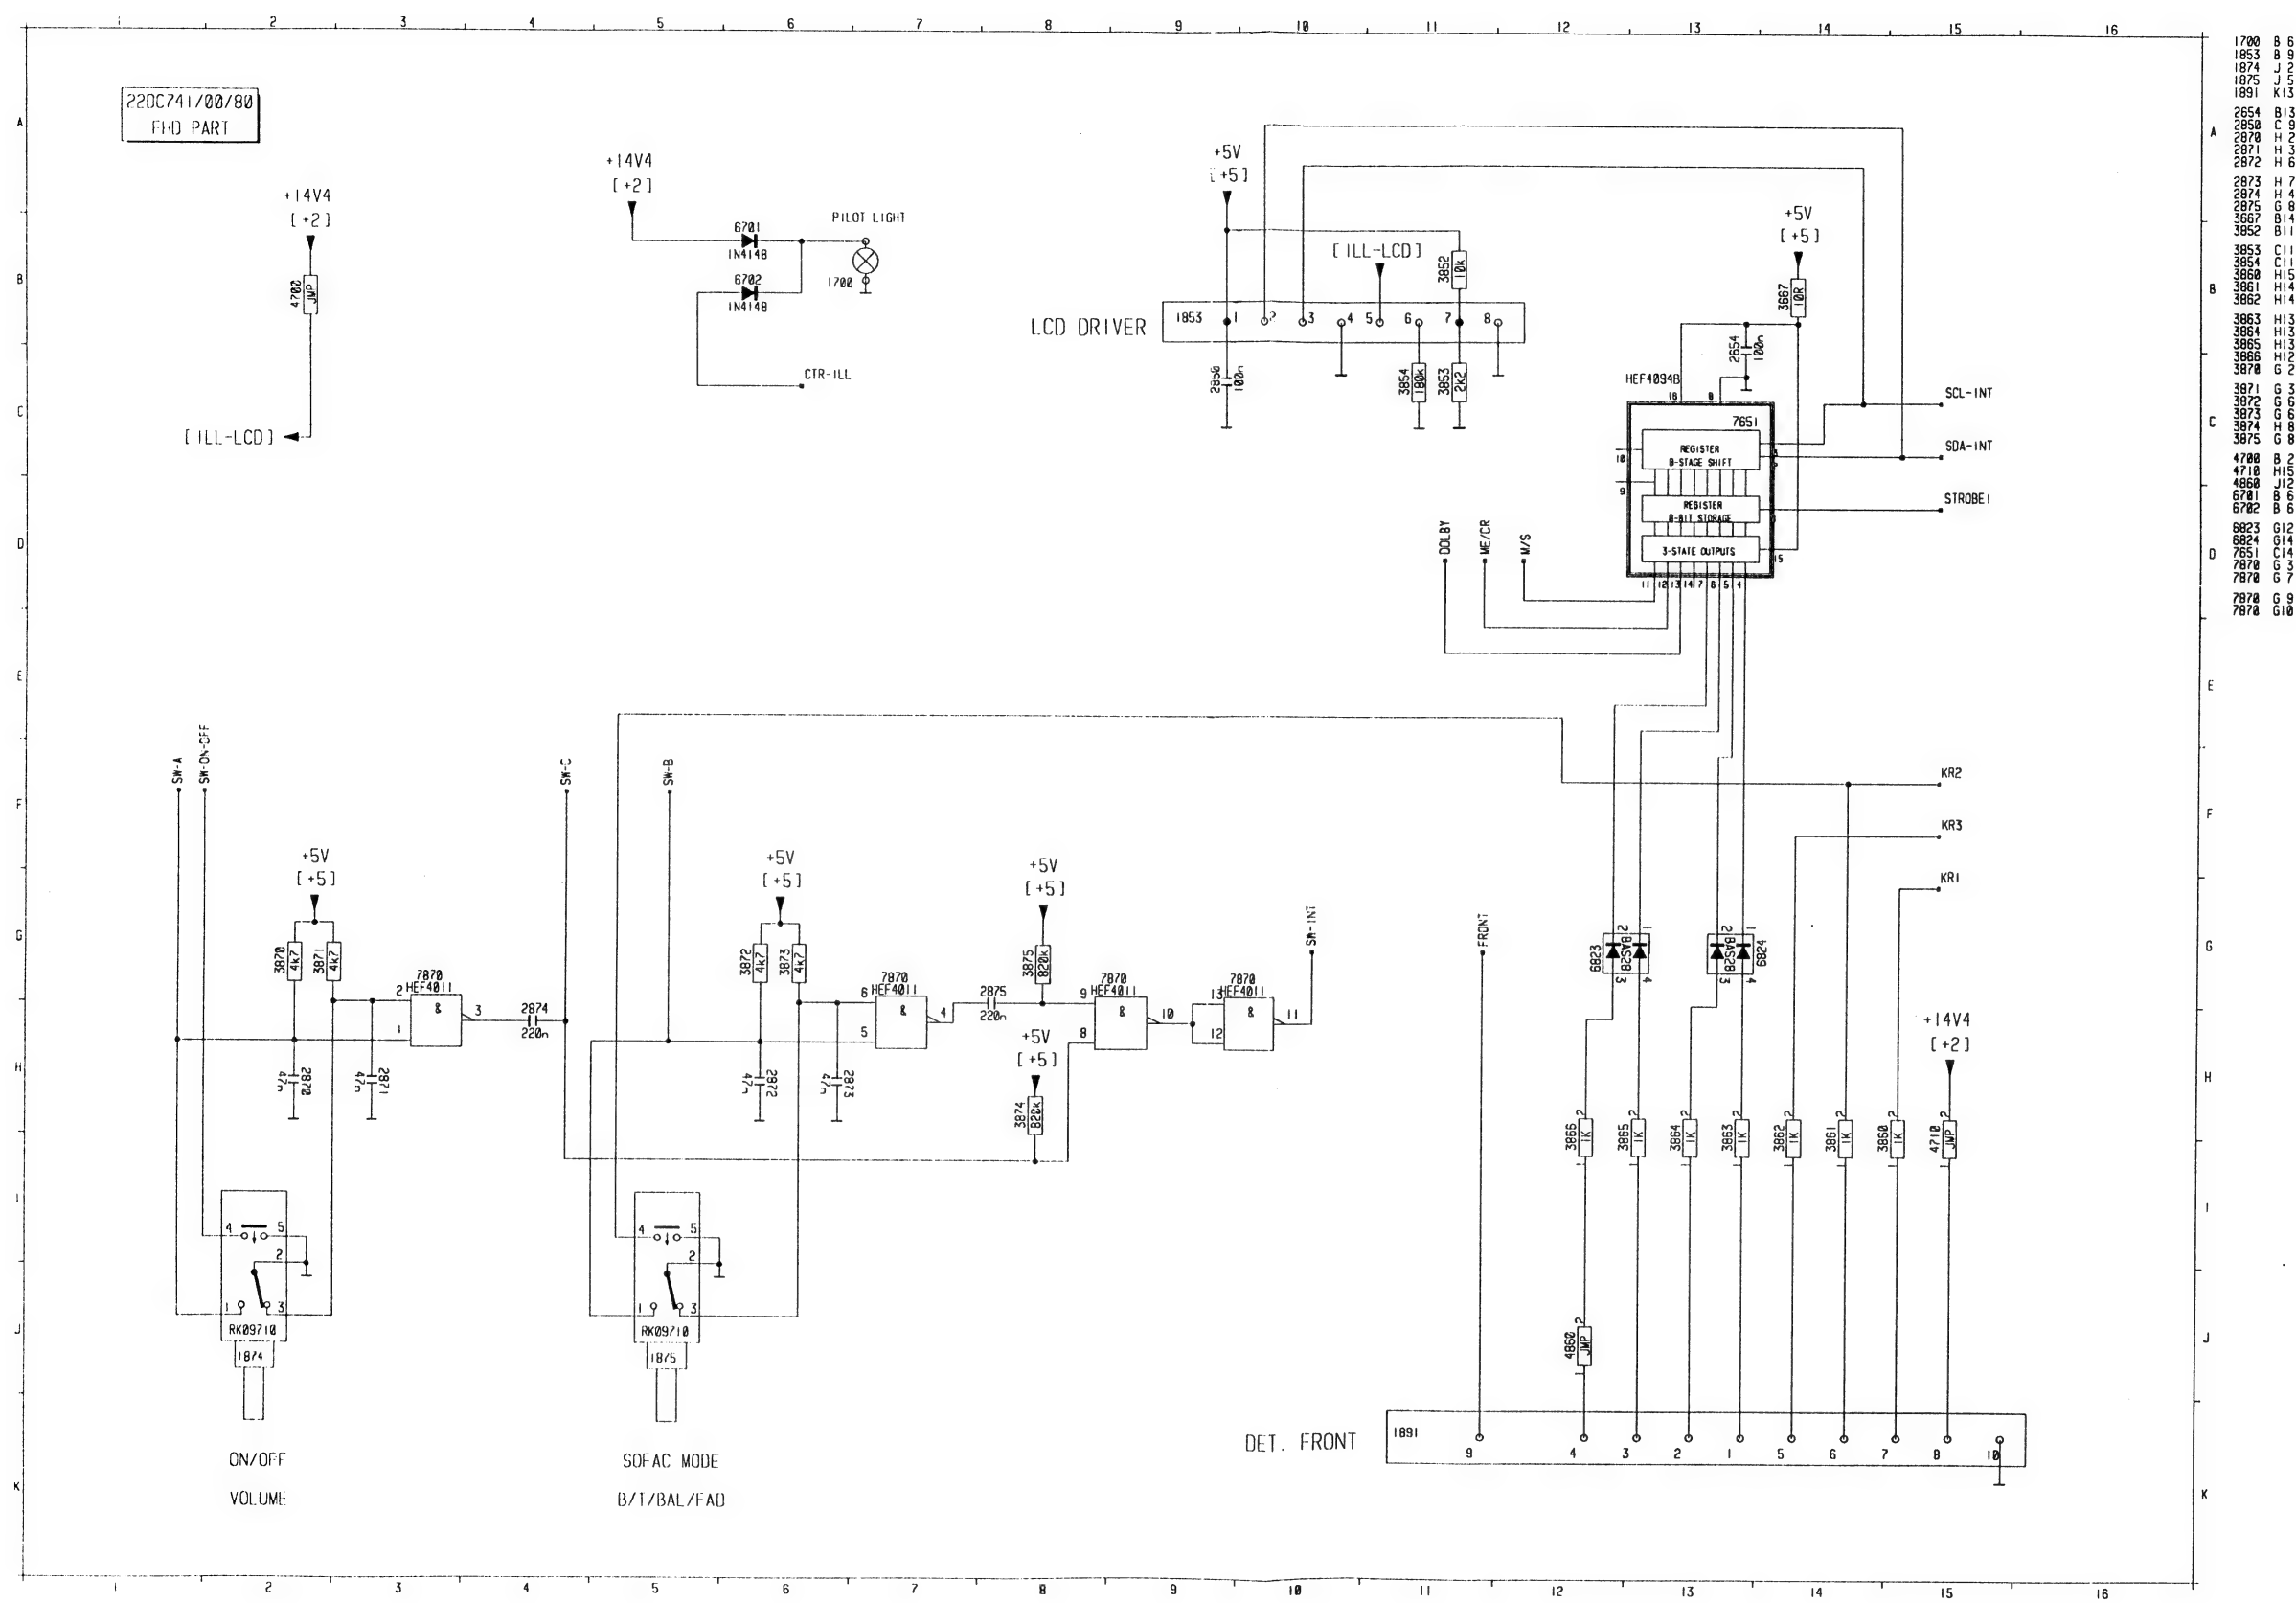


- 1700 B 6
- 1853 B 9
- 1874 J 2
- 1875 J 5
- 1891 K 13
- 2554 B 13
- 2558 C 9
- 2570 H 2
- 2571 H 3
- 2572 H 6
- 2573 H 7
- 2574 H 4
- 2575 G 8
- 3557 B 14
- 3552 B 11
- 3553 C 11
- 3554 C 11
- 3555 H 15
- 3556 H 14
- 3557 H 14
- 3558 H 13
- 3559 H 13
- 3560 H 13
- 3561 H 12
- 3562 G 2
- 3571 G 3
- 3572 G 6
- 3573 G 6
- 3574 H 8
- 3575 G 8
- 4700 B 2
- 4710 H 15
- 4650 B 12
- 5781 B 6
- 6702 B 6
- 6823 G 12
- 6824 G 14
- 7551 C 14
- 7570 G 3
- 7571 G 7
- 7572 G 9
- 7573 G 10

22DC741/00/80
LCD PCB

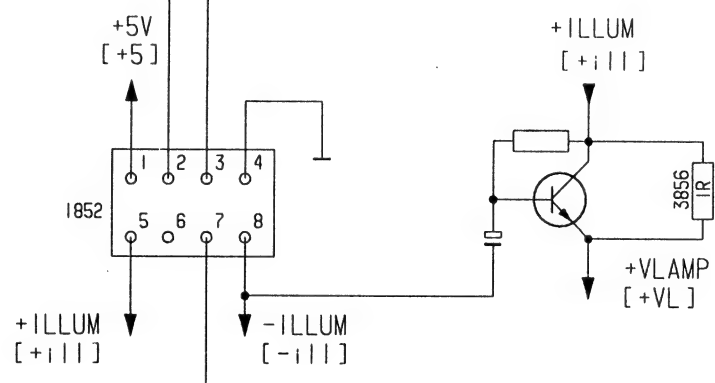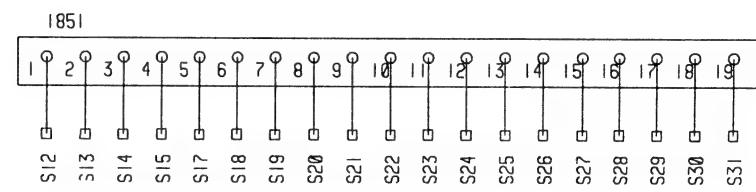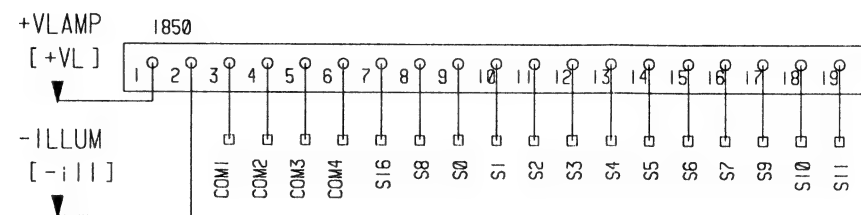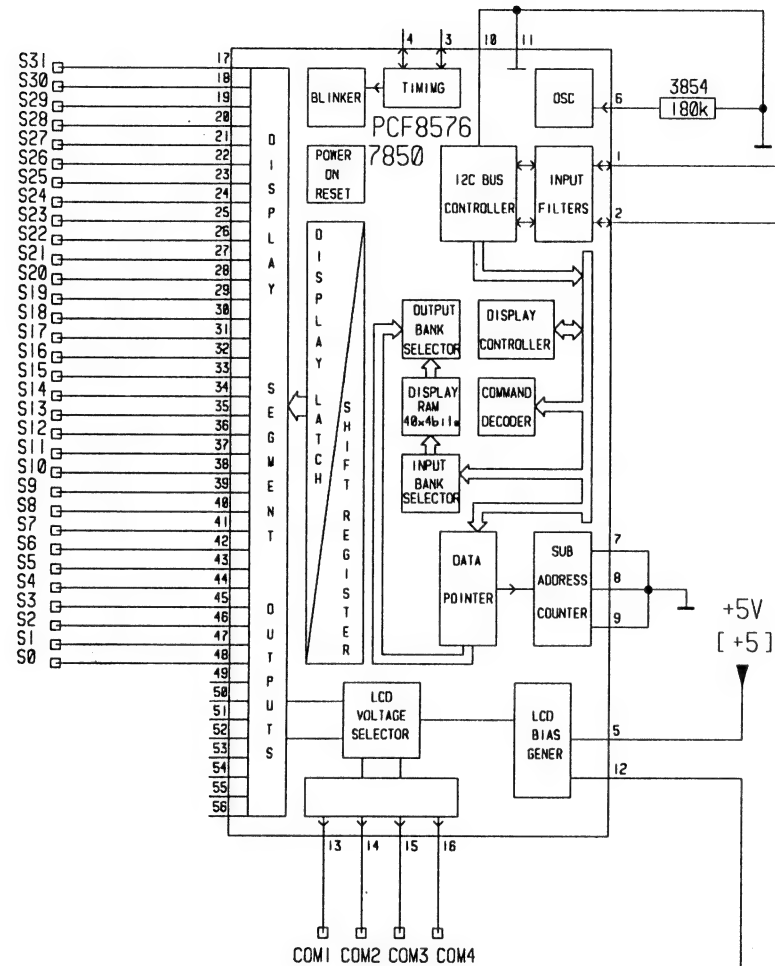

1850 B 8
1851 D 8
1852 F 6
2851 F 8
3854 B 5


3855 E 8
3856 F 9
7850 B 3
7851 F 9

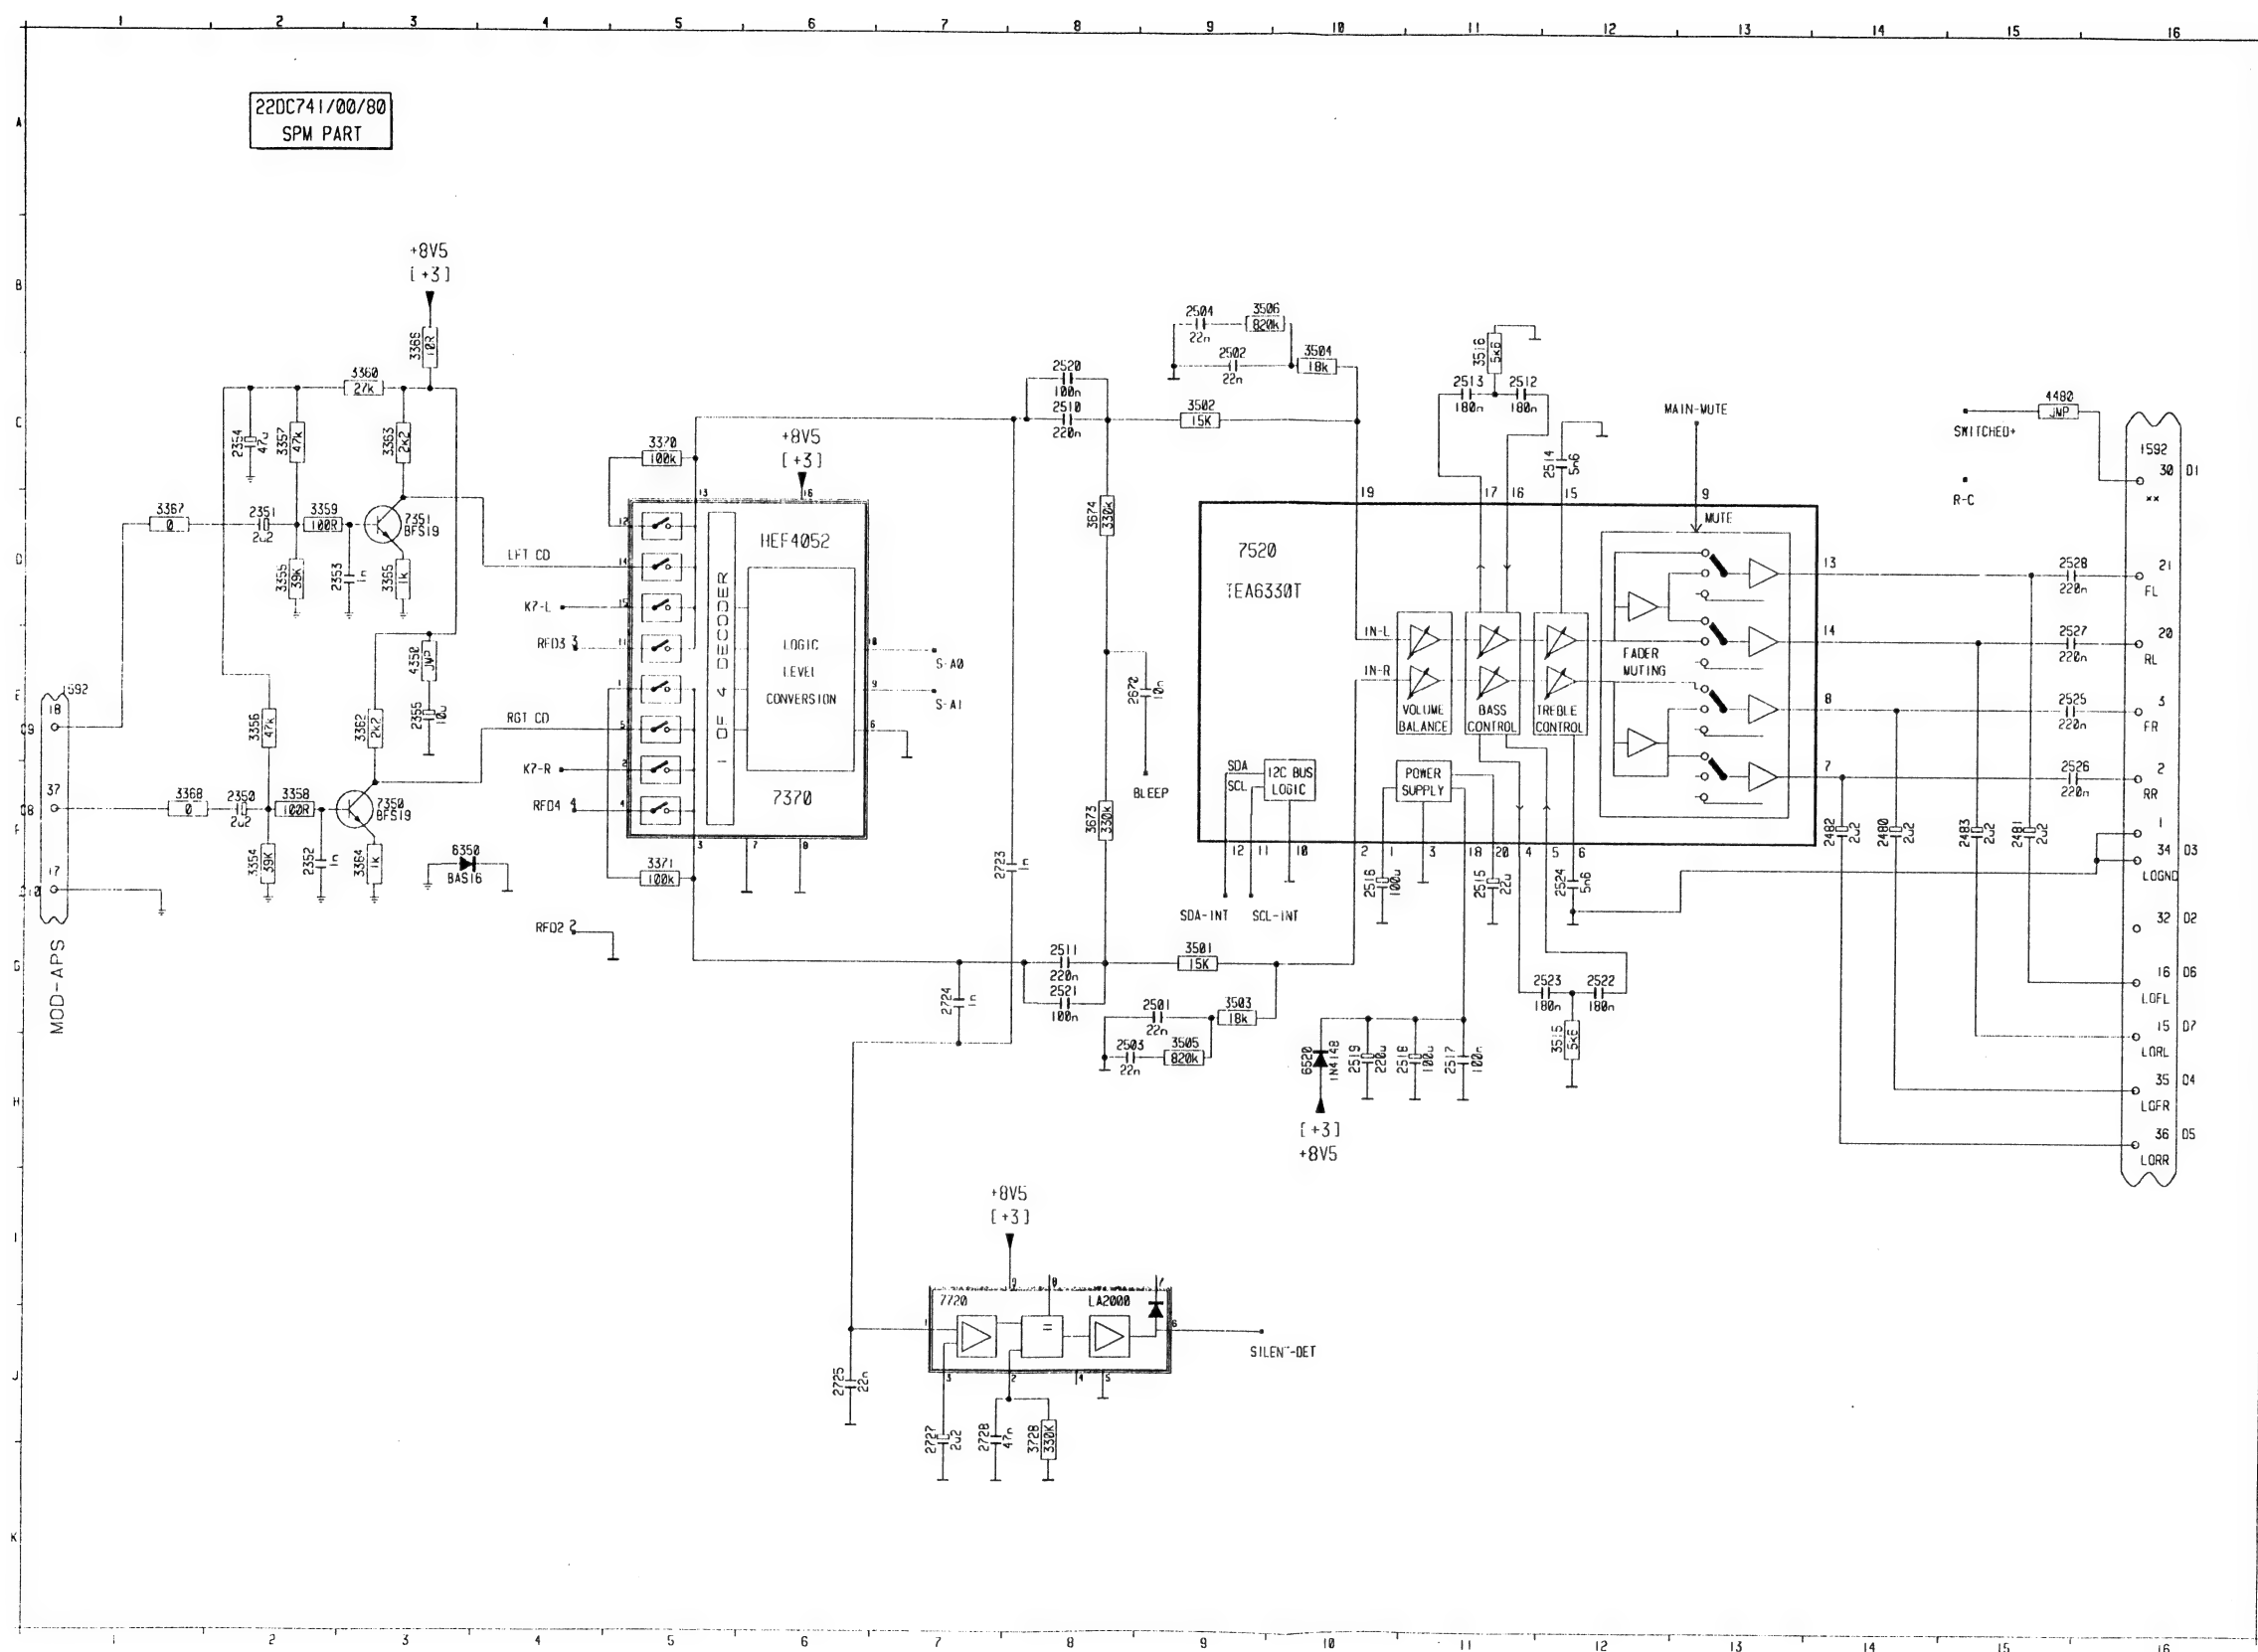

1592	F15
2350	F15
2351	F15
2352	F15
2353	F15
2354	F15
2355	F15
2480	F15
2481	F15
2482	F15
2483	F15
2501	G9
2502	G9
2503	G9
2504	G9
2510	C8
2511	G8
2512	C11
2513	C11
2514	C12
2515	F11
2516	F10
2517	H11
2518	H11
2519	H10
2520	C8
2521	G8
2522	G8
2523	G8
2524	F12
2525	F16
2526	F16
2527	F16
2528	F16
2529	F16
2530	F16
2531	F16
2532	F16
2533	F16
2534	F16
2535	F16
2536	F16
2537	F16
2538	F16
2539	F16
2540	F16
2541	F16
2542	F16
2543	F16
2544	F16
2545	F16
2546	F16
2547	F16
2548	F16
2549	F16
2550	F16
2551	F16
2552	F16
2553	F16
2554	F16
2555	F16
2556	F16
2557	F16
2558	F16
2559	F16
2560	F16
2561	F16
2562	F16
2563	F16
2564	F16
2565	F16
2566	F16
2567	F16
2568	F16
2569	F16
2570	F16
2571	F16
2572	F16
2573	F16
2574	F16
2575	F16
2576	F16
2577	F16
2578	F16
2579	F16
2580	F16
2581	F16
2582	F16
2583	F16
2584	F16
2585	F16
2586	F16
2587	F16
2588	F16
2589	F16
2590	F16
2591	F16
2592	F16
2593	F16
2594	F16
2595	F16
2596	F16
2597	F16
2598	F16
2599	F16
2600	F16
2601	F16
2602	F16
2603	F16
2604	F16
2605	F16
2606	F16
2607	F16
2608	F16
2609	F16
2610	F16
2611	F16
2612	F16
2613	F16
2614	F16
2615	F16
2616	F16
2617	F16
2618	F16
2619	F16
2620	F16
2621	F16
2622	F16
2623	F16
2624	F16
2625	F16
2626	F16
2627	F16
2628	F16
2629	F16
2630	F16
2631	F16
2632	F16
2633	F16
2634	F16
2635	F16
2636	F16
2637	F16
2638	F16
2639	F16
2640	F16
2641	F16
2642	F16
2643	F16
2644	F16
2645	F16
2646	F16
2647	F16
2648	F16
2649	F16
2650	F16
2651	F16
2652	F16
2653	F16
2654	F16
2655	F16
2656	F16
2657	F16
2658	F16
2659	F16
2660	F16
2661	F16
2662	F16
2663	F16
2664	F16
2665	F16
2666	F16
2667	F16
2668	F16
2669	F16
2670	F16
2671	F16
2672	F16
2673	F16
2674	F16
2675	F16
2676	F16
2677	F16
2678	F16
2679	F16
2680	F16
2681	F16
2682	F16
2683	F16
2684	F16
2685	F16
2686	F16
2687	F16
2688	F16
2689	F16
2690	F16
2691	F16
2692	F16
2693	F16
2694	F16
2695	F16
2696	F16
2697	F16
2698	F16
2699	F16
2700	F16
2701	F16
2702	F16
2703	F16
2704	F16
2705	F16
2706	F16
2707	F16
2708	F16
2709	F16
2710	F16
2711	F16
2712	F16
2713	F16
2714	F16
2715	F16
2716	F16
2717	F16
2718	F16
2719	F16
2720	F16
2721	F16
2722	F16
2723	F16
2724	F16
2725	F16
2726	F16
2727	F16
2728	F16
2729	F16
2730	F16
2731	F16
2732	F16
2733	F16
2734	F16
2735	F16
2736	F16
2737	F16
2738	F16
2739	F16
2740	F16
2741	F16
2742	F16
2743	F16
2744	F16
2745	F16
2746	F16
2747	F16
2748	F16
2749	F16
2750	F16
2751	F16
2752	F16
2753	F16
2754	F16
2755	F16
2756	F16
2757	F16
2758	F16
2759	F16
2760	F16
2761	F16
2762	F16
2763	F16
2764	F16
2765	F16
2766	F16
2767	F16
2768	F16
2769	F16
2770	F16
2771	F16
2772	F16
2773	F16
2774	F16
2775	F16
2776	F16
2777	F16
2778	F16
2779	F16
2780	F16
2781	F16
2782	F16
2783	F16
2784	F16
2785	F16
2786	F16
2787	F16
2788	F16
2789	F16
2790	F16
2791	F16
2792	F16
2793	F16
2794	F16
2795	F16
2796	F16
2797	F16
2798	F16
2799	F16
2800	F16

Main Panel

2059	F	6	2210	F	4	2481	H	8	2518	E	5	2528	E	7	2640	B	4	5190	I	5	5059	G	7	6607	A	7	1100	J	5	1891	H	1	5117	I	3	7370	D	3
2063	F	7	2211	F	2	2482	H	8	2518	E	6	2600	B	5	2657	A	4	5050	I	7	5180	H	5	6631	B	5	1254	J	2	3155	I	3	5150	I	2	7600	A	6
2064	F	6	2216	F	4	2483	H	8	2519	D	6	2601	B	6	2727	F	5	5051	I	7	5651	B	4	6671	D	2	1255	C	5	3157	I	3	5200	F	4	7601	A	7
2068	G	6	2350	D	7	2510	D	3	2522	E	5	2602	B	4	3625	B	7	5052	H	7	6002	J	7	6701	B	1	1592	G	8	3209	G	2	5650	B	2	7720	F	5
2157	G	4	2351	E	7	2511	E	3	2523	F	5	2603	B	5	3822	D	7	5053	H	7	6100	I	4	6702	C	1	1700	B	1	5055	G	5	7050	H	6	7750	C	4
2160	G	2	2354	E	6	2512	D	5	2525	E	6	2605	B	7	3823	D	7	5054	G	6	6520	E	4	6821	C	7	1853	D	4	5057	G	6	7150	H	3			
2185	H	5	2355	E	3	2513	D	5	2526	E	7	2607	B	7	5072	H	6	5056	G	5	6601	A	5	6822	C	7	1874	B	1	5070	F	7	7180	H	4			
2186	I	4	2480	G	8	2515	D	4	2527	E	7	2608	B	6	5073	I	2	5058	H	7	6603	A	5	1001	J	7	1875	C	1	5071	H	6	7210	F	3			

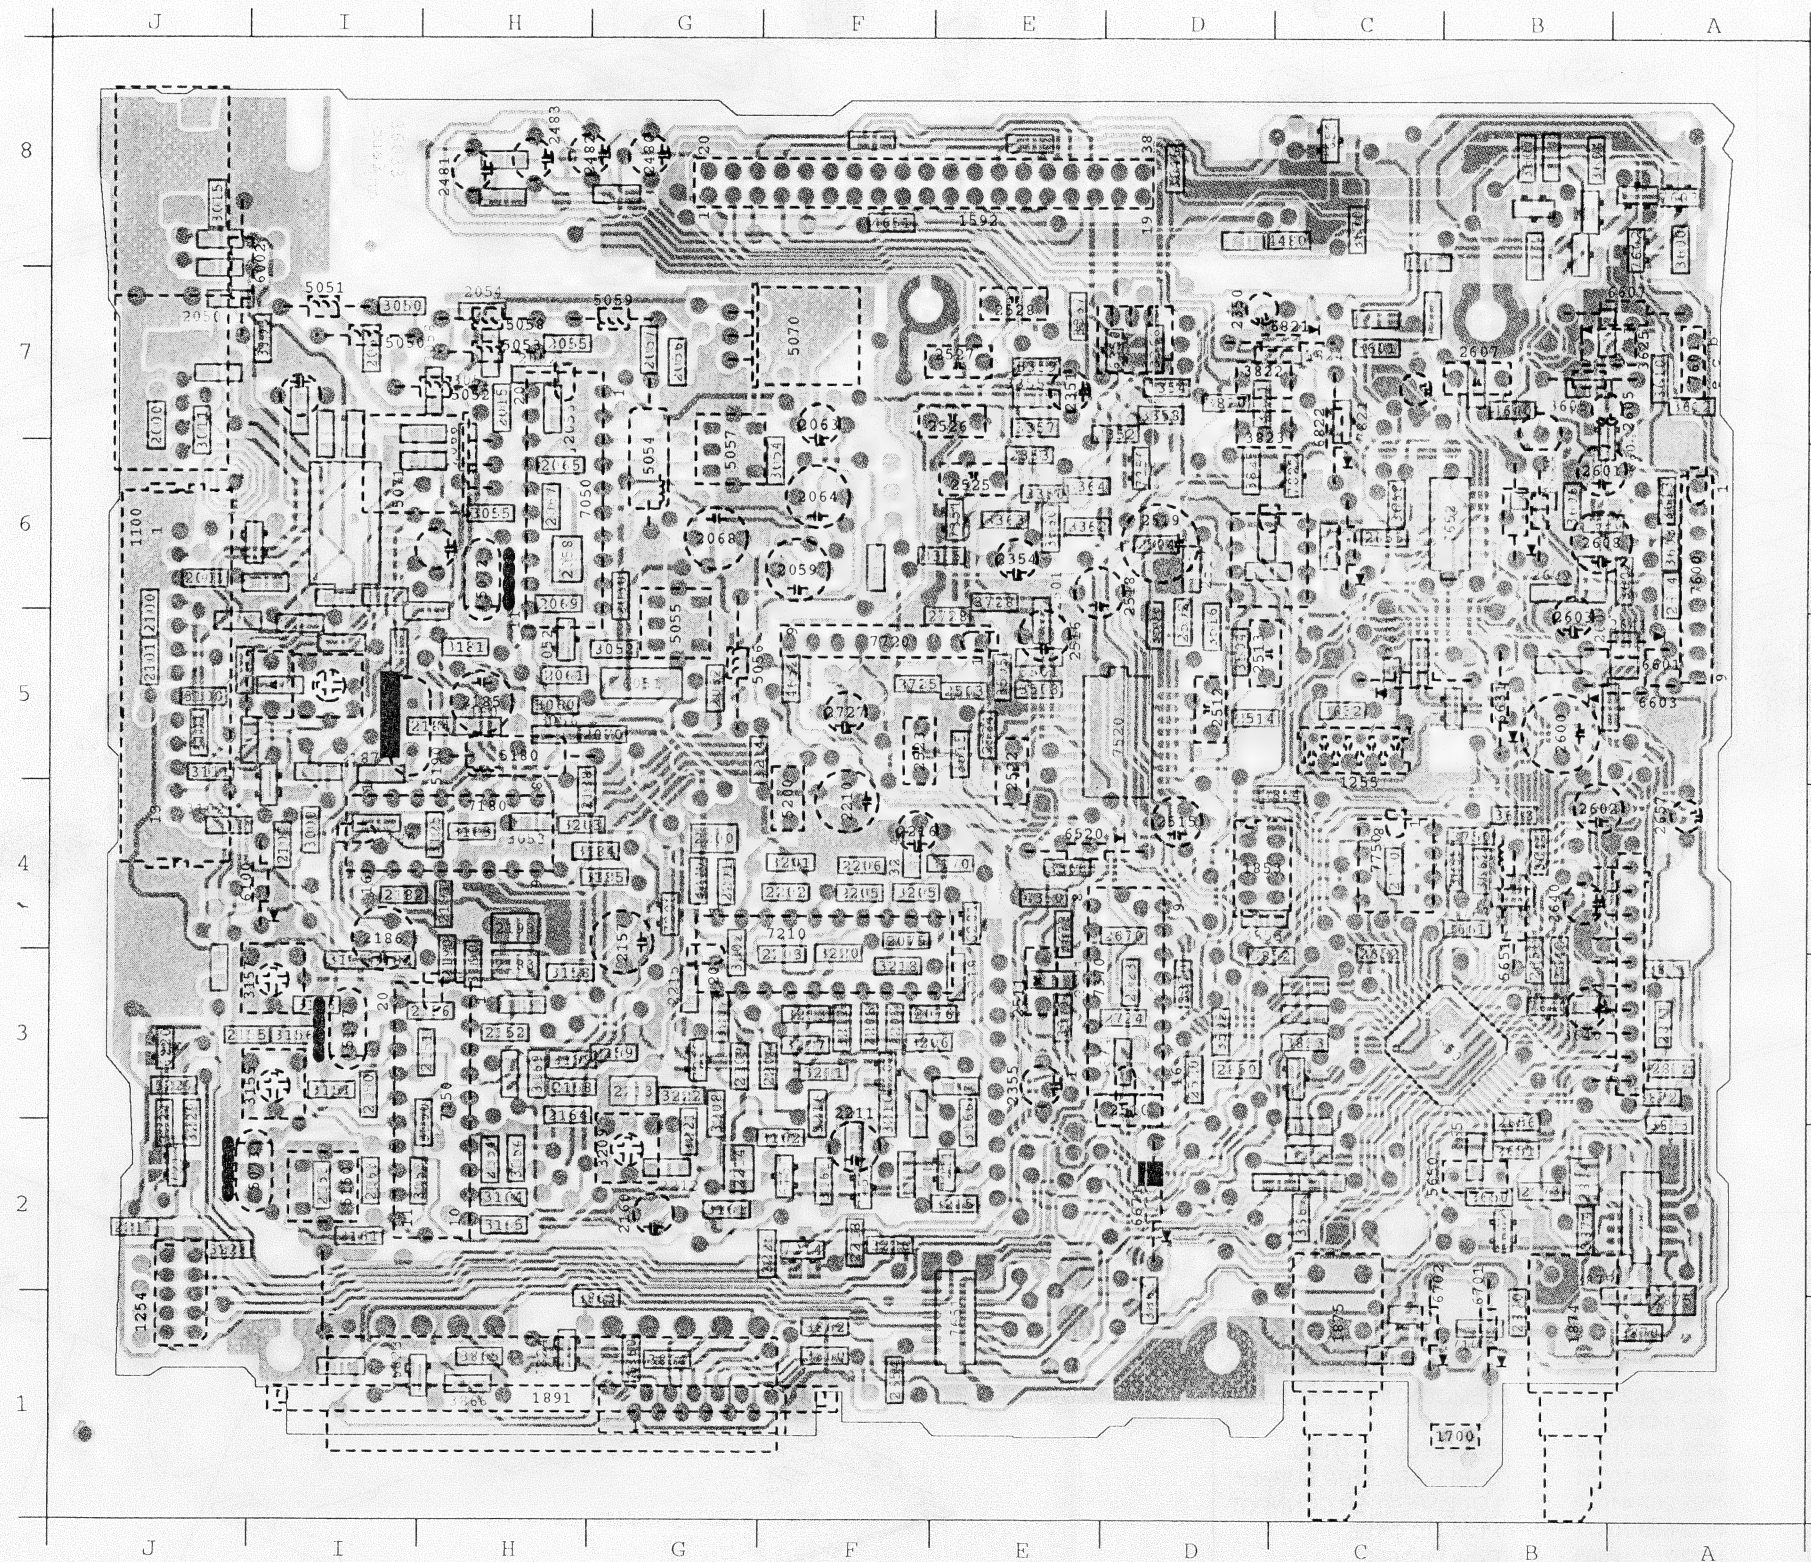

22 DC 741 / 00
22 DC 741 / 80


428
429
431
419
416(ASSY)
427
426 (ASSY)
401
402
404
408
406
407
411(X2)
409(ASSY)
433
434 (P6-25 / 2)
502
504
M 2.5 X 12
M 2.5 X 6 (X4)
M 2.5 X 4 TF (X2)
412
413
POWER PANEL
RDS PANEL
421
423
424
414
501

Mechanical Partslist

401	4822 459 50754	FRONT	419*	4822 134 41111	LAMP FLEXBASE 14V 80MA
402	4822 413 31723	KNOB ON/OFF/VOL/MUTE	421*	4822 134 40892	LAMP 14V 40MA
404	4822 413 31723	KNOB TON/FAD/BAL/LOUD	419#	4822 134 41123	LAMP ASSY 14V 80MA
406	4822 492 71033	FLAP SPRING	421#	4822 134 41119	LAMP ASSY 14V 40MA
407	4822 443 41153	FLAP CASSETTE	423	4822 267 50872	CONNECTOR DECK
408 *	4822 691 10393	DET. UNIT	424	4822 267 41008	CONNECTOR DECK HEAD
408 #	4822 691 10394	DET. UNIT	426	4822 404 20437	DEMOUNTING BRACKETS
409	4822 410 61842	SET OF BUTTONS DECK	427	4822 443 30463	SLEEVE
411	4822 492 71046	SPRING CLAMPING	428	4822 532 11092	BUFFER MOUNTING
412	4822 290 61031	CONNECTOR BLOCK	429	4822 321 10551	CABLE ADAPTER SUPPLY
413	4822 071 21003	FUSE 10A 250V	431	4822 267 41052	LOUDSPEAKER CONNECT
414	4822 267 30883	AERIAL BUSH ASSY	433	4822 600 70671	PLASTIC CASE
416	4822 130 91131	LCD ASSY	434	4822 701 12683	Deck P6-25/ 2
418	4822 214 51988	PCB ASSY LCD			





*ONLY 741/00 #ONLY 741/80

Miscellaneous			— —		
1100	4822 210 10305	TUNER	2180	5322 122 32654	22nF10%X7R 63V
1860	4822 276 13103	SWITCH	2182	4822 122 32891	68nF10%X7R 63V
1861	4822 276 13103	SWITCH	2183	4822 122 32916	220nF10%X7R 63V
1862	4822 276 13103	SWITCH	2184	5322 122 32654	22nF10%X7R 63V
1863	4822 276 13103	SWITCH	2185	4822 124 23624	47μF20% 16V
1864	4822 276 13103	SWITCH	2186	4822 124 23624	47μF20% 16V
1865	4822 276 13103	SWITCH	2187	5322 122 32659	33pF 5% 50V
1866	4822 276 13103	SWITCH	2188	5322 122 32654	22nF10%X7R 63V
1867	4822 276 13103	SWITCH	2190	4822 122 32542	47nF10%X7R 63V
1868	4822 276 13103	SWITCH	2191	4822 122 32597	6,8nF10%X7R 63V
1869	4822 276 13103	SWITCH	2193	4822 122 32916	220nF10%X7R 63V
1870	4822 276 13103	SWITCH	2200	4822 122 32916	220nF10%X7R 63V
1871	4822 276 13103	SWITCH	2201	5322 122 32654	22nF10%X7R 63V
1874	4822 273 10261	POTM	2202	4822 122 33496	100nF10%X7R 63V
1875	4822 273 10261	POTM	2203	4822 122 31768	180pF 2%NP0 63V
— —			2204	5322 122 32268	470pF 10% 50V
2000	4822 051 20008	0Ω 5% 0,1W	2205	5322 122 32268	470pF 10% 50V
2001	4822 051 20008	0Ω 5% 0,1W	2206	5322 122 32654	22nF10%X7R 63V
2015	5322 122 34098	10nF10%X7R 63V	2207	5322 122 31866	6,8nF10%X7R 63V
2050	4822 122 32597	6,8nF10%X7R 63V	2208	5322 122 31866	6,8nF10%X7R 63V
2051	5322 122 32287	4,7pF 5%NP0 50V	2209	4822 122 33496	100nF10%X7R 63V
2052	5322 122 32448	10pF 5% 50V	2210	4822 124 23624	47μF20% 16V
2053	5322 122 32659	33pF 5% 50V	2211	4822 124 41796	22μF20% 16V
2054	4822 122 33514	68pF 5%NP0 50V	2212	4822 122 31766	120pF 2%NP0 63V
2055	4822 122 33515	82pF 5%NP0 63V	2213	4822 122 32916	220nF10%X7R 63V
2056	4822 122 33514	68pF 5%NP0 50V	2214	4822 122 32916	220nF10%X7R 63V
2057	5322 122 34098	10nF10%X7R 63V	2215	4822 122 33216	270pF 5%NP0 50V
2058	4822 122 32916	220nF10%X7R 63V	2216	4822 124 41972	4,7μF20% 50V
2059	4822 124 23624	47μF20% 16V	2217	4822 122 31797	22nF10%X7R 63V
2060	4822 122 33216	270pF 5%NP0 50V	2218	4822 122 33496	100nF10%X7R 63V
2061	5322 122 32654	22nF10%X7R 63V	2250	4822 126 10333	560pF10%X7R 63V
2062	4822 122 33216	270pF 5%NP0 50V	2251	4822 126 10333	560pF10%X7R 63V
2063	4822 124 41969	1μF20% 50V	2252	4822 126 10333	560pF10%X7R 63V
2064	4822 124 23624	47μF20% 16V	2253	4822 126 10333	560pF10%X7R 63V
2065	4822 122 33496	100nF10%X7R 63V	2254	4822 122 32646	5,6nF10%X7R 50V
2066	5322 122 32658	22pF 5% 50V	2255	4822 122 32646	5,6nF10%X7R 50V
2067	4822 122 33496	100nF10%X7R 63V	2256	4822 124 40272	33μF20% 16V
2068	4822 124 23624	47μF20% 16V	2257	4822 124 40272	33μF20% 16V
2069	5322 122 34098	10nF10%X7R 63V	2258	4822 124 40272	33μF20% 16V
2070	5322 122 32654	22nF10%X7R 63V	2259	4822 124 22403	10μF 20% 16V
2075	4822 122 33496	100nF10%X7R 63V	2265	4822 124 23432	100μF20% 10V
2076	4822 122 33496	100nF10%X7R 63V	2266	5322 122 32654	22nF10%X7R 63V
2100	5322 122 32654	22nF10%X7R 63V	2275	4822 121 42408	220nF 5% 63V
2101	5322 122 34098	10nF10%X7R 63V	2276	4822 121 42408	220nF 5% 63V
2102	5322 122 34098	10nF10%X7R 63V	2277	4822 124 41969	1μF20% 50V
2150	4822 122 33496	100nF10%X7R 63V	2278	4822 121 42408	220nF 5% 63V
2151	4822 122 32542	47nF10%X7R 63V	2279	4822 121 42408	220nF 5% 63V
2152	4822 122 32542	47nF10%X7R 63V	2350	4822 124 40244	2,2μF20% 63V
2153	4822 122 33515	82pF 5%NP0 63V	2351	4822 124 40244	2,2μF20% 63V
2154	5322 122 32654	22nF10%X7R 63V	2352	5322 122 34123	1nF10%X7R 50V
2155	4822 122 33496	100nF10%X7R 63V	2353	5322 122 34123	1nF10%X7R 50V
2156	4822 122 32542	47nF10%X7R 63V	2354	4822 124 23624	47μF20% 16V
2157	4822 124 23624	47μF20% 16V	2355	4822 124 22403	10μF 20% 16V
2158	5322 126 10223	4,7nF10%X7R 63V	2480	5322 124 41379	2,2μF20% 50V
2159	5322 126 10223	4,7nF10%X7R 63V	2481	5322 124 41379	2,2μF20% 50V
2160	4822 124 40244	2,2μF20% 63V	2482	5322 124 41379	2,2μF20% 50V
2161	4822 122 33181	150pF 5% NP0 50V	2483	5322 124 41379	2,2μF20% 50V
2163	4822 122 33514	68pF 5%NP0 50V	2501	5322 122 32654	22nF10%X7R 63V
2164	4822 122 32627	2,7nF10%X7R 50V	2502	5322 122 32654	22nF10%X7R 63V

H			H		
2503	5322 122 32654	22nF10%X7R 63V	2654	4822 122 33496	100nF10%X7R 63V
2504	5322 122 32654	22nF10%X7R 63V	2655	4822 122 33496	100nF10%X7R 63V
2510	4822 121 42408	220nF 5% 63V	2656	5322 122 32654	22nF10%X7R 63V
2511	4822 121 42408	220nF 5% 63V	2657	4822 124 41969	1μF20% 50V
2512	4822 121 51356	180nF10% 63V	2658	5322 122 32654	22nF10%X7R 63V
2513	4822 121 51356	180nF10% 63V	2670	5322 122 34098	10nF10%X7R 63V
2514	4822 122 32646	5,6nF10%X7R 50V	2700	4822 122 33515	82pF 5%NP0 63V
2515	4822 124 41796	22μF20% 16V	2701	4822 122 33496	100nF10%X7R 63V
2516	4822 124 23432	100μF20% 10V	2702	4822 124 40244	2,2μF20% 63V
2517	4822 122 33496	100nF10%X7R 63V	2703	4822 126 10333	560pF10%X7R 63V
2518	4822 124 23432	100μF20% 10V	2704	5322 122 32452	47pF 5%NP0 63V
2519	4822 124 23768	220μF20% 10V	2705	4822 122 33515	82pF 5%NP0 63V
2520	4822 122 33496	100nF10%X7R 63V	2723	5322 122 34123	1nF10%X7R 50V
2521	4822 122 33496	100nF10%X7R 63V	2724	5322 122 34123	1nF10%X7R 50V
2522	4822 121 51356	180nF10% 63V	2725	5322 122 32654	22nF10%X7R 63V
2523	4822 121 51356	180nF10% 63V	2727	4822 124 40244	2,2μF20% 63V
2524	4822 122 32646	5,6nF10%X7R 50V	2728	4822 122 32542	47nF10%X7R 63V
2525	4822 121 42408	220nF 5% 63V	2750	4822 122 33496	100nF10%X7R 63V
2526	4822 121 42408	220nF 5% 63V	2752	4822 122 33496	100nF10%X7R 63V
2527	4822 121 42408	220nF 5% 63V	2753	4822 122 33496	100nF10%X7R 63V
2528	4822 121 42408	220nF 5% 63V	2757	4822 124 41796	22μF20% 16V
2550	5322 122 32268	470pF 10% 50V	2759	4822 122 33496	100nF10%X7R 63V
2551	5322 122 32268	470pF 10% 50V	2760	4822 122 33496	100nF10%X7R 63V
2552	5322 122 32268	470pF 10% 50V	2765	5322 122 32659	33pF 5% 50V
2553	5322 122 32268	470pF 10% 50V	2766	5322 122 32659	33pF 5% 50V
2554	4822 122 33496	100nF10%X7R 63V	2770	5322 122 34098	10nF10%X7R 63V
2555	4822 122 33496	100nF10%X7R 63V	2771	5322 122 31863	330pF 5%NP0 50V
2556	5322 126 10223	4,7nF10%X7R 63V	2772	4822 122 31768	180pF 2%NP0 63V
2557	5322 126 10223	4,7nF10%X7R 63V	2773	4822 126 10847	1,8nF10%X7R 63V
2558	5322 126 10223	4,7nF10%X7R 63V	2774	5322 122 32268	470pF 10% 50V
2559	5322 126 10223	4,7nF10%X7R 63V	2775	4822 122 33515	82pF 5%NP0 63V
2560	5322 126 10223	4,7nF10%X7R 63V	2782	4822 122 33496	100nF10%X7R 63V
2561	5322 126 10223	4,7nF10%X7R 63V	2850	4822 122 33496	100nF10%X7R 63V
2562	5322 126 10223	4,7nF10%X7R 63V	2870	4822 122 32542	47nF10%X7R 63V
2563	5322 126 10223	4,7nF10%X7R 63V	2871	4822 122 32542	47nF10%X7R 63V
2564	5322 126 10223	4,7nF10%X7R 63V	2872	4822 122 32542	47nF10%X7R 63V
2570	4822 124 40201	1000μF20% 16V	2873	4822 122 32542	47nF10%X7R 63V
2571	4822 124 40201	1000μF20% 16V	2874	4822 122 32916	220nF10%X7R 63V
2572	4822 124 40201	1000μF20% 16V	2875	4822 122 32916	220nF10%X7R 63V
2573	4822 124 40201	1000μF20% 16V			
2574	5322 122 32654	22nF10%X7R 63V			
2587	4822 122 33181	150pF 5% NP0 50V			
2588	4822 122 33181	150pF 5% NP0 50V			
2589	4822 122 33181	150pF 5% NP0 50V			
2600	4822 124 21519	220μF 16V			
2601	4822 124 41506	47μF 20% 16V			
2602	4822 124 41506	47μF 20% 16V			
2603	4822 124 40248	10μF20% 63V			
2604	4822 122 32542	47nF10%X7R 63V			
2605	4822 124 41969	1μF20% 50V			
2606	4822 122 32916	220nF10%X7R 63V	3000	4822 051 20008	0Ω 5% 0,1W
2607	4822 121 51356	180nF10% 63V	3011	4822 051 20008	0Ω 5% 0,1W
2608	4822 124 41506	47μF 20% 16V	3015	4822 051 20008	0Ω 5% 0,1W
2609	5322 122 32654	22nF10%X7R 63V	3050	4822 051 20561	560Ω 5% 0,1W
2640	4822 124 41796	22μF20% 16V	3051	4822 051 20471	470Ω 5% 0,1W
2641	4822 122 33496	100nF10%X7R 63V	3052	4822 051 20184	180K00 5% 0,1W
2650	5322 122 32658	22pF 5% 50V	3053	4822 051 20472	4K70 5% 0,1W
2651	5322 122 32452	47pF 5%NP0 63V	3054	4822 051 20102	1K00 5% 0,1W
2652	5322 122 32654	22nF10%X7R 63V	3055	4822 051 20102	1K00 5% 0,1W
			3056	4822 051 20393	39K00 5% 0,1W
			3058	4822 051 20474	470K00 5% 0,1W
			3060	4822 051 20103	10K00 5% 0,1W
			3100	4822 051 20103	10K00 5% 0,1W
			3101	4822 051 20109	10Ω 5% 0,1W
			3102	4822 051 20471	470Ω 5% 0,1W
			3103	4822 051 20475	4M70 5% 0,1W
			3111	4822 051 20569	56Ω 5% 0,1W
			3115	4822 051 20569	56Ω 5% 0,1W
			3116	4822 051 20102	1K00 5% 0,1W

					
3125	4822 051 20102	1K00 5% 0,1W	3257	4822 051 20473	47K00 5% 0,1W
3150	4822 051 20331	330Ω 5% 0,1W	3258	4822 051 20333	33K00 5% 0,1W
3151	4822 051 20331	330Ω 5% 0,1W	3259	4822 051 20333	33K00 5% 0,1W
3153	4822 051 20222	2K20 5% 0,1W	3260	5322 100 11541	220Ω 30% 0,3W
3154	4822 051 20109	10Ω 5% 0,1W	3261	5322 100 11541	220Ω 30% 0,3W
3155	4822 100 20166	10K 30%LIN 0,1W	3262	4822 051 20473	47K00 5% 0,1W
3156	4822 051 20222	2K20 5% 0,1W	3263	4822 051 20473	47K00 5% 0,1W
3157	4822 100 20166	10K 30%LIN 0,1W	3275	4822 051 10183	18K00 2% 0,25W
3158	4822 051 20109	10Ω 5% 0,1W	3276	4822 051 20223	22K00 5% 0,1W
3159	4822 051 20681	680Ω 5% 0,1W	3277	4822 051 20223	22K00 5% 0,1W
3161	4822 051 20683	68K00 5% 0,1W	3354	4822 051 20393	39K00 5% 0,1W
3162	4822 051 20222	2K20 5% 0,1W	3355	4822 051 20393	39K00 5% 0,1W
3163	4822 051 20271	270Ω 5% 0,1W	3356	4822 051 20473	47K00 5% 0,1W
3164	4822 051 20273	27K00 5% 0,1W	3357	4822 051 20473	47K00 5% 0,1W
3165	4822 051 20102	1K00 5% 0,1W	3358	4822 051 20101	100Ω 5% 0,1W
3166	4822 051 20008	0Ω 5% 0,1W	3359	4822 051 20101	100Ω 5% 0,1W
3169	4822 051 20331	330Ω 5% 0,1W	3360	4822 051 20273	27K00 5% 0,1W
3170	4822 051 20008	0Ω 5% 0,1W	3362	4822 051 20222	2K20 5% 0,1W
3180	4822 051 20103	10K00 5% 0,1W	3363	4822 051 20222	2K20 5% 0,1W
3181	4822 051 20103	10K00 5% 0,1W	3364	4822 051 20102	1K00 5% 0,1W
3182	4822 051 20331	330Ω 5% 0,1W	3365	4822 051 20102	1K00 5% 0,1W
3183	4822 051 20475	4M70 5% 0,1W	3366	4822 051 20109	10Ω 5% 0,1W
3184	4822 051 20102	1K00 5% 0,1W	3367	4822 051 20008	0Ω 5% 0,1W
3185	4822 051 20103	10K00 5% 0,1W	3368	4822 051 20008	0Ω 5% 0,1W
3190	4822 051 20332	3K30 5% 0,1W	3370	4822 051 20104	100K00 5% 0,1W
3200	4822 051 20273	27K00 5% 0,1W	3371	4822 051 20104	100K00 5% 0,1W
3201	4822 051 20104	100K00 5% 0,1W	3501	4822 051 20153	15K00 5% 0,1W
3202	4822 051 20222	2K20 5% 0,1W	3502	4822 051 20153	15K00 5% 0,1W
3203	4822 051 20474	470K00 5% 0,1W	3503	4822 051 20183	18K00 5% 0,1W
3204	4822 051 20824	820K00 5% 0,1W	3504	4822 051 20183	18K00 5% 0,1W
3205	4822 051 20393	39K00 5% 0,1W	3505	4822 051 20824	820K00 5% 0,1W
3206	4822 051 20393	39K00 5% 0,1W	3506	4822 051 20824	820K00 5% 0,1W
3207	4822 051 20474	470K00 5% 0,1W	3515	4822 051 20562	5K60 5% 0,1W
3208	4822 051 20273	27K00 5% 0,1W	3516	4822 051 20562	5K60 5% 0,1W
3209	4822 100 11163	100K 30%LIN 0,1W	3556	4822 051 20478	4Ω70 5% 0,1W
3210	4822 051 20471	470Ω 5% 0,1W	3557	4822 051 20478	4Ω70 5% 0,1W
3211	4822 051 20104	100K00 5% 0,1W	3558	4822 051 20478	4Ω70 5% 0,1W
3212	4822 051 20103	10K00 5% 0,1W	3559	4822 051 20478	4Ω70 5% 0,1W
3213	4822 051 20681	680Ω 5% 0,1W	3560	4822 051 20478	4Ω70 5% 0,1W
3214	4822 051 20109	10Ω 5% 0,1W	3561	4822 051 20478	4Ω70 5% 0,1W
3215	4822 051 20475	4M70 5% 0,1W	3562	4822 051 20478	4Ω70 5% 0,1W
3216	4822 051 20472	4K70 5% 0,1W	3563	4822 051 20478	4Ω70 5% 0,1W
3217	4822 051 20103	10K00 5% 0,1W	3564	4822 051 20472	4K70 5% 0,1W
3218	4822 051 20472	4K70 5% 0,1W	3565	4822 051 20472	4K70 5% 0,1W
3219	4822 051 20472	4K70 5% 0,1W	3566	4822 051 20473	47K00 5% 0,1W
3220	4822 051 20104	100K00 5% 0,1W	3584	4822 116 40218	
3221	4822 051 20683	68K00 5% 0,1W	3586	4822 051 20223	22K00 5% 0,1W
3222	4822 051 20273	27K00 5% 0,1W	3587	4822 051 20103	10K00 5% 0,1W
3224	4822 051 20334	330K00 5% 0,1W	3588	4822 051 20103	10K00 5% 0,1W
3225	4822 051 20104	100K00 5% 0,1W	3590	4822 051 20102	1K00 5% 0,1W
3226	4822 051 20474	470K00 5% 0,1W	3600	4822 051 20183	18K00 5% 0,1W
3227	4822 051 20153	15K00 5% 0,1W	3601	4822 051 20101	100Ω 5% 0,1W
3228	4822 051 20103	10K00 5% 0,1W	3602	4822 051 20473	47K00 5% 0,1W
3229	4822 051 20475	4M70 5% 0,1W	3603	4822 051 20102	1K00 5% 0,1W
3252	4822 051 20681	680Ω 5% 0,1W	3604	4822 051 20183	18K00 5% 0,1W
3253	4822 051 20681	680Ω 5% 0,1W	3605	4822 051 20473	47K00 5% 0,1W
3254	4822 051 20474	470K00 5% 0,1W	3606	4822 051 20473	47K00 5% 0,1W
3255	4822 051 20474	470K00 5% 0,1W	3607	4822 051 20103	10K00 5% 0,1W
3256	4822 051 20473	47K00 5% 0,1W	3610	4822 051 20393	39K00 5% 0,1W

					
3611	4822 051 20393	39K00 5% 0,1W	3871	4822 051 20472	4K70 5% 0,1W
3612	4822 051 20184	180K00 5% 0,1W	3872	4822 051 20472	4K70 5% 0,1W
3613	4822 051 20103	10K00 5% 0,1W	3873	4822 051 20472	4K70 5% 0,1W
3625	4822 116 40216	4Ω	3874	4822 051 20824	820K00 5% 0,1W
3631	4822 051 20103	10K00 5% 0,1W	3875	4822 051 20824	820K00 5% 0,1W
3632	4822 051 20102	1K00 5% 0,1W	3880	4822 116 52215	220E 5% 0,5W
3633	4822 051 20153	15K00 5% 0,1W	3881	4822 116 52215	220E 5% 0,5W
3640	4822 051 20473	47K00 5% 0,1W	3882	4822 116 52215	220E 5% 0,5W
3642	4822 051 20473	47K00 5% 0,1W	4350	4822 051 20008	0Ω 5% 0,1W
3644	4822 051 20473	47K00 5% 0,1W	4480	4822 051 20008	0Ω 5% 0,1W
3646	4822 051 20682	6K80 5% 0,1W	4640	4822 051 20008	0Ω 5% 0,1W
3650	4822 051 20271	270Ω 5% 0,1W	4651	4822 051 20008	0Ω 5% 0,1W
3655	4822 051 20153	15K00 5% 0,1W	4652	4822 051 20008	0Ω 5% 0,1W
3661	4822 051 20103	10K00 5% 0,1W	4700	4822 051 20008	0Ω 5% 0,1W
3662	4822 051 20103	10K00 5% 0,1W	4710	4822 051 20008	0Ω 5% 0,1W
3667	4822 051 20109	10Ω 5% 0,1W	4860	4822 051 20008	0Ω 5% 0,1W
3668	4822 051 20109	10Ω 5% 0,1W			
3670	4822 051 20473	47K00 5% 0,1W			
3673	4822 051 20334	330K00 5% 0,1W	5050	4822 152 20677	10μH
3674	4822 051 20334	330K00 5% 0,1W	5051	4822 152 20677	10μH
3700	4822 051 20222	2K20 5% 0,1W	5052	4822 157 60122	4.7μH
3728	4822 051 20334	330K00 5% 0,1W	5053	4822 152 20677	10μH
3750	4822 051 20109	10Ω 5% 0,1W	5054	4822 157 50975	1 mH
3771	4822 051 20682	6K80 5% 0,1W	5055	4822 152 20682	Adj.ind. 6.15uH 10.7MHz
3772	4822 051 20152	1K50 5% 0,1W	5056	4822 152 20678	33μH
3774	4822 051 20103	10K00 5% 0,1W	5057	4822 152 20683	Adj.ind. 28MHz 2.52MHz
3775	4822 051 20103	10K00 5% 0,1W	5058	4822 157 52983	22μH
3776	4822 051 20104	100K00 5% 0,1W	5059	4822 157 52983	22μH
3777	4822 051 20682	6K80 5% 0,1W	5070	4822 242 72076	10,7 MHz
3778	4822 051 20104	100K00 5% 0,1W	5071	4822 242 72076	10,7 MHz
3779	4822 051 20104	100K00 5% 0,1W	5072	4822 242 71883	SFE10,7MS318-D
3780	4822 051 20103	10K00 5% 0,1W	5073	4822 242 71883	SFE10,7MS318-D
3781	4822 051 20392	3K90 5% 0,1W	5117	4822 242 80368	SFE10,7MS2W4-A
3782	4822 051 20104	100K00 5% 0,1W	5150	4822 156 11081	Adj.ind.1.47uH 10.7MHz
3784	4822 051 20104	100K00 5% 0,1W	5180	4822 157 50975	1 MHz
3785	4822 051 20152	1K50 5% 0,1W	5190	4822 242 71874	4 MHz
3786	4822 051 20008	0Ω 5% 0,1W	5200	4822 242 81117	CSB456F11
3787	4822 051 20183	18K00 5% 0,1W	5570	4822 157 63311	COIL FILTER ASSY
3788	4822 051 20222	2K20 5% 0,1W	5650	4822 242 81118	CSA11,5MTS1
3820	4822 051 20103	10K00 5% 0,1W	5700	4822 242 80259	LN-G8-311(TPR11)
3821	4822 051 20103	10K00 5% 0,1W	5762	4822 242 81118	CSA11,5MTS1
3822	4822 116 40221	8Ω 20%	5780	4822 152 20585	COIL ASSY
3823	4822 116 40221	8Ω 20%	5781	4822 152 20585	COIL ASSY
3824	4822 051 20102	1K00 5% 0,1W			
3825	4822 051 20102	1K00 5% 0,1W			
3833	4822 051 20183	18K00 5% 0,1W	6002	4822 252 60125	DSP201
3852	4822 051 20103	10K00 5% 0,1W	6051	4822 130 82596	BB419
3853	4822 051 20222	2K20 5% 0,1W	6100	4822 130 30621	1N4148
3854	4822 051 20184	180K00 5% 0,1W	6150	5322 130 31928	BAS16
3854	4822 116 52252	180K 5% 0,5W	6201	5322 130 31928	BAS16
3856	4822 116 80176	1Ω 5% 0,5W	6220	5322 130 31928	BAS16
3860	4822 051 20102	1K00 5% 0,1W	6350	5322 130 31928	BAS16
3861	4822 051 20102	1K00 5% 0,1W	6520	4822 130 30621	1N4148
3862	4822 051 20102	1K00 5% 0,1W	6550	4822 130 80125	BZX84-C5V6
3863	4822 051 20102	1K00 5% 0,1W	6570	4822 130 82465	1.5KE27P
3864	4822 051 20102	1K00 5% 0,1W	6590	5322 130 80214	BAS28
3865	4822 051 20102	1K00 5% 0,1W	6601	4822 130 30594	BAV10
3866	4822 051 20102	1K00 5% 0,1W	6602	5322 130 80214	BAS28
3870	4822 051 20472	4K70 5% 0,1W	6603	4822 130 34499	BZX79-C20
			6604	5322 130 80214	BAS28

					
6607	5322 130 30684	1N4002	7552	5322 130 41982	BC848B
6631	4822 130 34174	BZX79-C4V7	7582	5322 130 41983	BC858B
6671	4822 130 30621	1N4148	7600	4822 209 31978	TDA3602/N1
6701	4822 130 30621	1N4148	7601	4822 130 62651	ON4414
6702	4822 130 30621	1N4148	7602	5322 130 60508	BC857B
6780	5322 130 31928	BAS16			
6821	4822 130 32904	BZV85-C5V6	7603	4822 130 60511	BC847B
6822	4822 130 32904	BZV85-C5V6	7610	4822 130 60511	BC847B
6823	5322 130 80214	BAS28	7631	5322 130 60508	BC857B
6824	5322 130 80214	BAS28	7640	4822 130 60511	BC847B
6880	4822 130 82989*	THLO2400	7650	4822 209 32119	P83C528FFB/018
6880	4822 130 83161#	GREEN LED			
6881	4822 130 82989*	THLO2400	7651	5322 209 11306	HEF4094BT
6881	4822 130 83161#	GREEN LED	7652	5322 209 11306	HEF4094BT
6882	4822 130 82989*	THLO2400	7653	4822 130 60511	BC847B
6882	4822 130 83161#	GREEN LED	7720	4822 209 83159	LA2000
6883	4822 130 82989*	THLO2400	7750	4822 900 10327	X24C16P
6883	4822 130 83161#	GREEN LED	7751	4822 209 31982	P83CE654FFB/501
6884	4822 130 82989*	THLO2400	7752	5322 209 60424	PC74HC573T
6884	4822 130 83161#	GREEN LED	7753	4822 209 31163	FCF61C65LL-85T
6885	4822 130 82989*	THLO2400	7754	4822 209 31981	SAA6579T
6885	4822 130 83161#	GREEN LED	7770	4822 209 31977	TL072I
6886	4822 130 82989*	THLO2400	7781	4822 130 60511	BC847B
6886	4822 130 83161#	GREEN LED	7783	4822 130 60511	BC847B
6887	4822 130 82989*	THLO2400	7821	4822 130 42132	BC807
6887	4822 130 83161#	GREEN LED	7822	4822 130 42132	BC807
6888	4822 130 82989*	THLO2400	7850	5322 209 11129	PCF8576T
6888	4822 130 83161#	GREEN LED	7870	5322 209 14476	HEF4011BT
6889	4822 130 82989*	THLO2400			
6889	4822 130 83161#	GREEN LED			
6890	4822 130 82989*	THLO2400			
6890	4822 130 83161#	GREEN LED			
6891	4822 130 82989*	THLO2400			
6891	4822 130 83161#	GREEN LED			
*ONLY 741/00 #ONLY 741/80					
					
7050	4822 209 72247	TEA6200/V2			
7052	5322 130 60508	BC857B			
7150	4822 209 73507	TEA6100/N3			
7152	4822 130 60511	BC847B			
7180	4822 209 30858	TSA6057/C1			
7200	4822 130 60511	BC847B			
7202	5322 130 60508	BC857B			
7210	4822 209 30859	TDA1591/V3			
7211	4822 130 63087	BF545 A			
7212	4822 130 60511	BC847B			
7213	4822 130 60511	BC847B			
7214	4822 130 60511	BC847B			
7250	4822 209 63939	TA7705F			
7275	4822 209 30856	HA12134F			
7350	4822 130 42353	BFS19			
7351	4822 130 42353	BFS19			
7370	4822 209 10263	HEF4052BP			
7520	4822 209 31979	TEA6330T/V1			
7550	4822 209 31661	TDA1553Q			
7551	4822 209 31661	TDA1553Q			

Service
Service
Service

Service Manual

CCCLXXXV

A 4822 390 20128
 B 4822 390 10107
 D 4822 390 20116
 101 4822 466 81479
 102 4822 462 30242
 103 4822 466 70526
 104 4822 466 70527
 107 4822 522 20325
 109 4822 522 20327
 113 4822 520 30406
 114 4822 492 90076
 116 4822 528 80985
 117 4822 358 31136
 118 4822 520 30407
 119 4822 403 40157
 122 4822 249 30179
 123 4822 528 80983
 124 4822 459 80209
 126 4822 277 10749
 127 4822 277 10748
 128 4822 522 20326
 131 4822 276 13081
 130 4822 403 52509
 132 4822 361 21103
 133 4822 502 12548
 134 4822 403 10225
 135 4822 492 63217
 136 4822 403 52031
 137 4822 528 80984
 139 4822 404 21169
 149 4822 404 20568
 150 4822 492 41275
 155 4822 528 81144
 166 4822 404 20593
 167 4822 404 20585
 168 4822 256 91801
 171 4822 404 20951 P6-25/2
 171 4822 404 21174 P6-25/3
 172 4822 492 63216
 174 4822 321 61271 P6-25/2
 174 4822 321 61516 P6-25/3
 175 4822 404 21173 P6-25/3
 176 4822 281 50113 P6-25/3
 177 4822 281 60165 P6-25/3
 180 4822 256 91799
 183 4822 492 71064
 184 4822 404 21232 P6-25/3

Deck complete: 4822 701 12683 P6-25/2
 4822 701 12684 P6-25/3

P6-25/2

